


LOC	DIST	P	LTR	DATE	DMN	APVD
—	—	—	—	—	—	—

REVISIONS

NO.	DATE	DMN	APVD
—	—	—	—

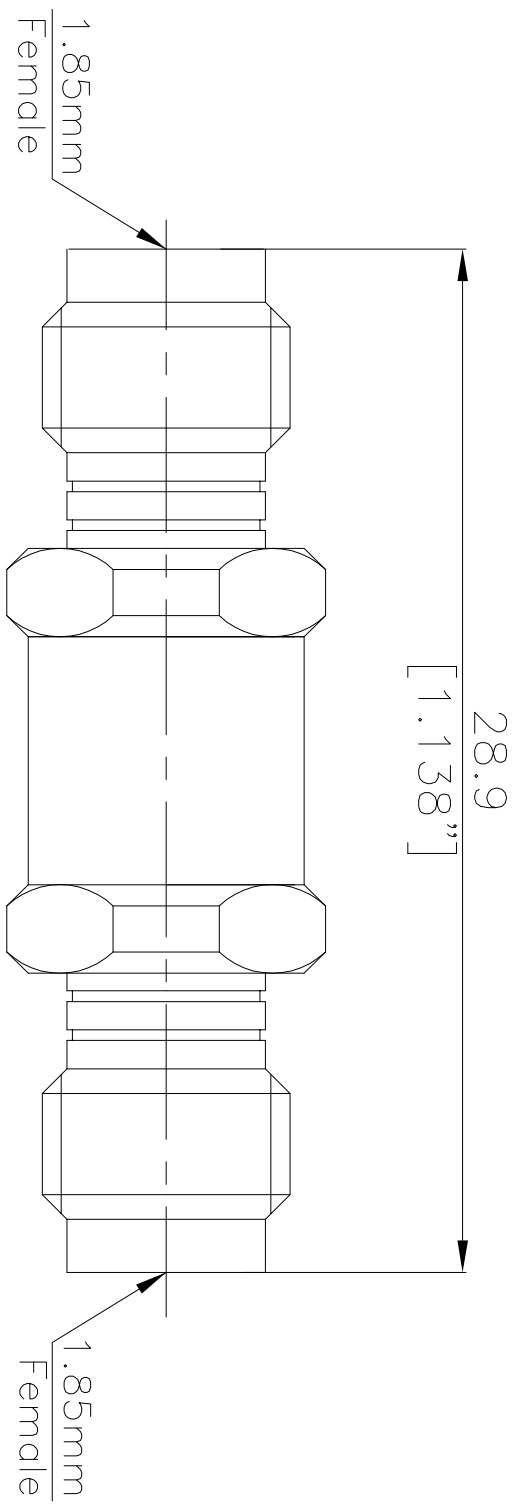

NOTES:

- 1.ELECTRICAL:
  - 1.1 IMPEDANCE: 50Ω
  - 1.2 INSULATION RESISTANCE:5000MΩ MIN
  - 1.3 FREQUENCY RANGE: DC~67GHZ
  - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
  - 1.5 VSWR≤1.30:1@67GHZ
  - 1.6 INSERTION LOSS: 0.3dB

- 2.ENVIRONMENTAL:
  - TEMPERATURE RANGE: -55° to +165°

3.MATERIAL AND FINISH:

- (1) BODY: STAINLESS STEEL, PASSIVATE
- (3) CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- (4) DIELECTRIC: PEI, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN	DWP	17/12/2018
CHK		

DIMENSIONS	MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 P/C	±0.25	
1 P/C	±0.15	
2 P/C	±0.12	
3 P/C	±	
ANGLES	±1°	

APVD	PRODUCT SPEC	NAME
	APPLICATION SPEC	1.85mm Female TO 1.85mm Female Adapter

APVD	PRODUCT SPEC	NAME
	APPLICATION SPEC	1.85mm Female TO 1.85mm Female Adapter

SIZE	TAPE CODE	DRAWING NO	SCALE	SHEET	OF	R/E
A4	00779	1.85mm-KK	2: 1	1	1	1

4 3 2 1