

THIS DRAWING UNPUBLISHED.

RELEASED FOR PUBLICATION

LOC DIST

P LTR

REVISIONS


DATE

DMN

APVD

28.9

[1.138"]

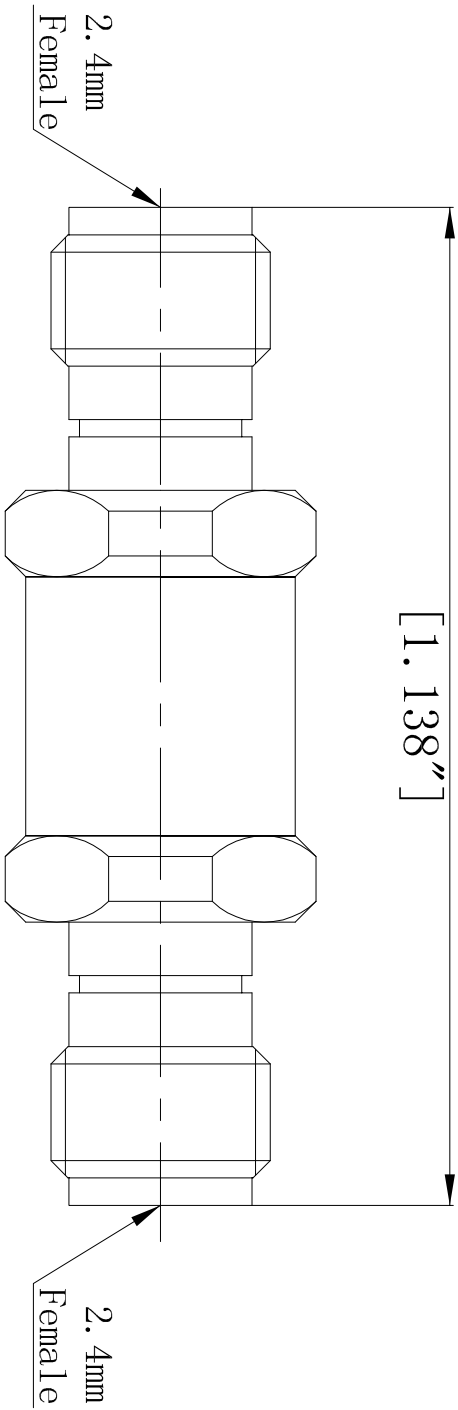

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~50GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR≤1.20:1@50GHz
- 1.6 INSERTION LOSS: 0.3 dB

2.ENVIRONMENTAL:

TEMPERATURE RANGE: -55° to +165°

3.MATERIAL AND FINISH:

- (1) BODY: STAINLESS STEEL, PASSIVATE
- (2) CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- (3) DIELECTRIC: PEI, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN	DWP	17/12/2018	Jiangsu ZDeci Microwave Technology Co., Ltd.
CHK			
DIMENSIONS		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
MM	0 P/C	±0.25	
	1 P/C	±0.15	
	2 P/C	±0.12	
	3 P/C	±	
	ANGLES	±1°	
FINISH		APPLY TO ALL SURFACES UNLESS OTHERWISE SPECIFIED:	
MATERIAL		WEIGHT	
SEE TABLE		CUSTOMER DRAWING	
NAME		SIZE	
2.4mm Female TO 2.4mm Female Adapter		CAGE CODE	
A4		DRAWING NO	
00779		2.4-KK	
SCALE		SHEET	
2: 1		1 OF 1	
R/E		1	

4

3

2

1

A

B

C

D

A

B

C

D