


LOC	DIST	P	LTR	DATE	DMN	APVD
—	—	—	—	—	—	—

19.7

[.775"]

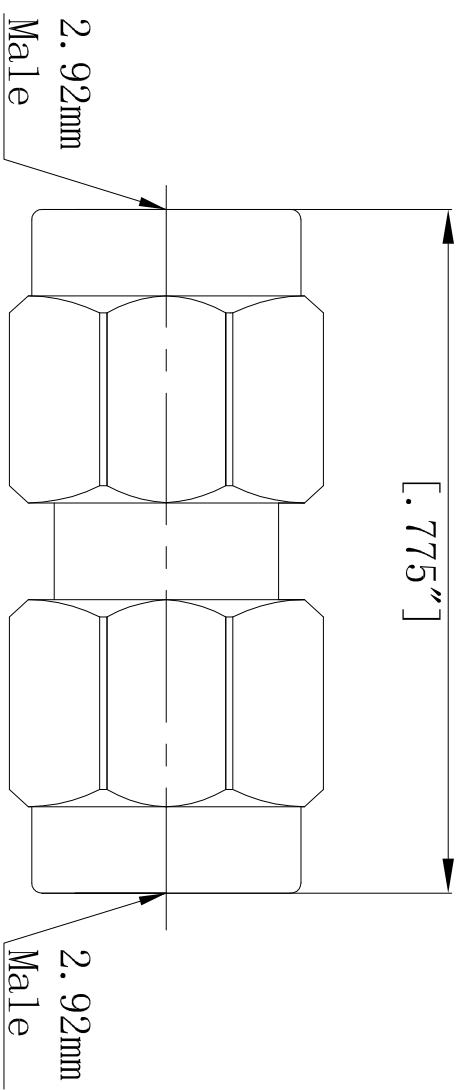

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~40GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR≤1.25:1@40GHz
- 1.6 INSERTION LOSS: 0.3 dB

2.ENVIRONMENTAL:

TEMPERATURE RANGE: -55° to +165°

3.MATERIAL AND FINISH:

- (1) BODY: STAINLESS STEEL, PASSIVATE
- (2) NUT: STAINLESS STEEL, PASSIVATE
- (3) CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- (4) DIELECTRIC: PEI, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN	DWP	17/12/2018	<p>Jiangsu Zdecl Microwave Technology Co., Ltd.</p>
CHK			
DIMENSIONS MM			NAME
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 P/C ±0.25 1 P/C ±0.15 2 P/C ±0.12 3 P/C ± ANGLES 1°			2.92 Male To 2.92 Male Adaptor
DIMENSIONS MM			SIZE
SEE TABLE			A4
FINISH			TAG# CODE
SEE TABLE			00779
APPLICATION SPEC			DRAWING NO
CUSTOMER DRAWING			2.92-UJ
WEIGHT			SCALE
SEE TABLE			2: 1
SHEET			1 OF 1
RVE			1

4 3 2 1