


19.2

[.756"]

SW5.5

[.217" ACROSS
(2) FLATS]

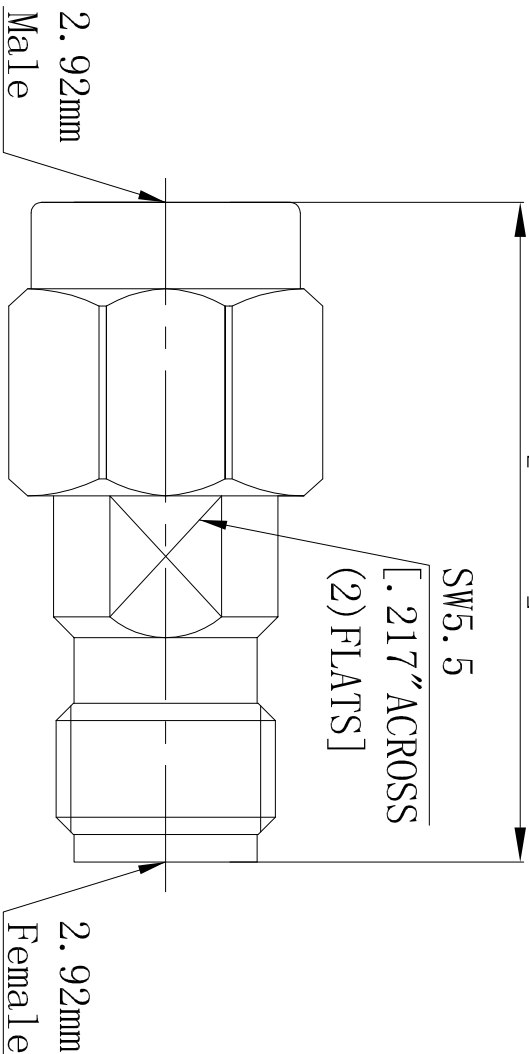

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~40GHZ
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR≤1.25:1@40GHZ
- 1.6 INSERTION LOSS: 0.3 dB

2.ENVIRONMENTAL:


TEMPERATURE RANGE: -55° to +165°

3.MATERIAL AND FINISH:

- (1) BODY: STAINLESS STEEL, PASSIVATE
- (2) NUT: STAINLESS STEEL, PASSIVATE
- (3) CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- (4) DIELECTRIC: PEI, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS



TOLERANCES UNLESS OTHERWISE SPECIFIED:

- 0 P/C ±0.25
- 1 P/C ±0.15
- 2 P/C ±0.12
- 3 P/C ±
- ANGLES ±1°

DMN	DWP	17/12/2018
CHK		
APVD	PRODUCT SPEC	
	APPLICATION SPEC	
	WEIGHT	
	CUSTOMER DRAWING	

	NAME	
	2.92 Male To 2.92 Female Adaptor	
SIZE	TAGE CODE	DRAWING NO
A4	00779	2.92-JK
SCALE	SHEET	OF
2: 1	1	1
R/E		
1		

4

4

3

2

1

3

2

1

A

B

C

D

A

B

C

D