


LOC	DIST	P	LTR	DATE	DMN	APVD
---	---	---	---	---	---	---

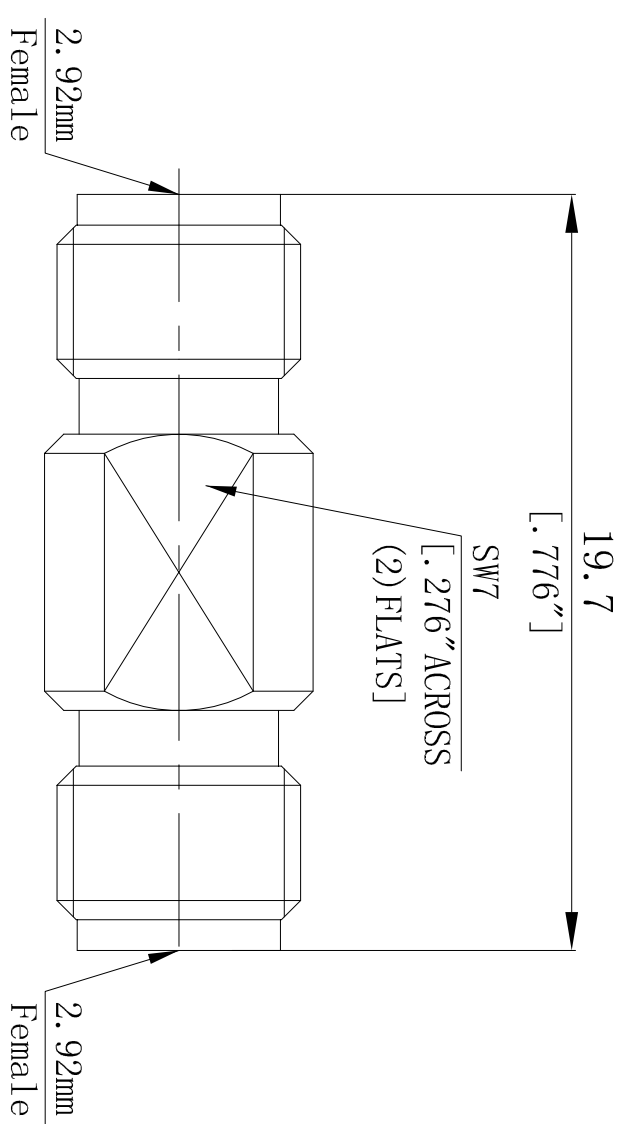

NOTES:

1. ELECTRICAL:
- 1.1 IMPEDANCE: 50Ω
  - 1.2 INSULATION RESISTANCE: 50000MΩ MIN
  - 1.3 FREQUENCY RANGE: DC~40GHZ
  - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
  - 1.5 VSWR ≤ 1.25:1 @ 40GHZ
  - 1.6 INSERTION LOSS: 0.3 dB
2. ENVIRONMENTAL:
- TEMPERATURE RANGE: -55° to +165°

3. MATERIAL AND FINISH:

- (1) BODY: STAINLESS STEEL, PASSIVATE
- (2) CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- (3) DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN	DWP	17/12/2018	NAME	
DIMENSIONS MM		CHK			jiangsu ZDecl Microwave Technology Co., Ltd.	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD			2.92 Female To 2.92 Female Adaptor	
0 P/C ±0.25		PRODUCT SPEC		SIZE TAG# CODE DRAWING NO		
1 P/C ±0.15		APPLICATION SPEC		A4 00779 2.92-KK		
2 P/C ±0.12		WEIGHT		SCALE 2: 1 SHEET 1 OF 1 R/E 1		
3 P/C ±		CUSTOMER DRAWING				
4 ANGLES 1°						
MATERIAL SEE TABLE		FINISH SEE TABLE				