


REVISIONS

LOC	DIST	P	LTR	DATE	DMN	APVD
—	—	—	—	—	—	—

4 | 3 | 2 | 1

26.7  
[1.051"]

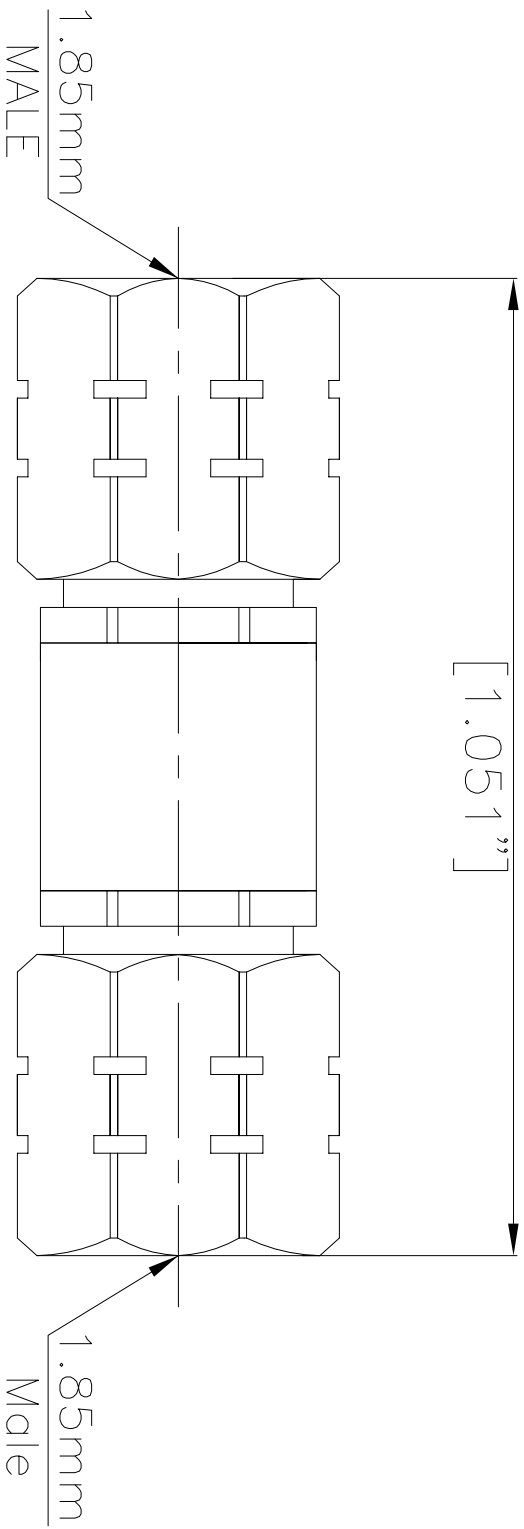

NOTES:

1. ELECTRICAL:
  - 1.1 IMPEDANCE: 50Ω
  - 1.2 INSULATION RESISTANCE: 50000MΩ MIN
  - 1.3 FREQUENCY RANGE: DC~67GHz
  - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
  - 1.5 VSWR≤1.30:1@67GHz
  - 1.6 INSERTION LOSS: 0.3dB
2. ENVIRONMENTAL:
  - TEMPERATURE RANGE: -55° to +165°
3. MATERIAL AND FINISH:
  - (1) BODY: STAINLESS STEEL, PASSIVATE
  - (3) CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
  - (4) DIELECTRIC: PEI, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN	DWP	17/12/2018	Jiangsu Zdecl Microwave Technology Co., Ltd.
CHK			
APVD	PRODUCT SPEC	NAME	1.85mm Male TO 1.85mm Male Adapter
TOLERANCES UNLESS OTHERWISE SPECIFIED:			SIZE
0 P.C.	±0.25		A4
1 P.C.	±0.15		DWG CODE
2 P.C.	±0.12		00779
3 P.C.	±		DRAWING NO
ANGLES	±1°		1.85mm-JJ

FINISH	SEE TABLE	WEIGHT	SCALE	2: 1	SHEET	1	OF	1	R/E	1
MATERIAL	SEE TABLE	APPLICATION SPEC								

4 | 3 | 2 | 1