


LOC		DIST		REVISIONS			
P	LTR	DATE	DMN	APVD			

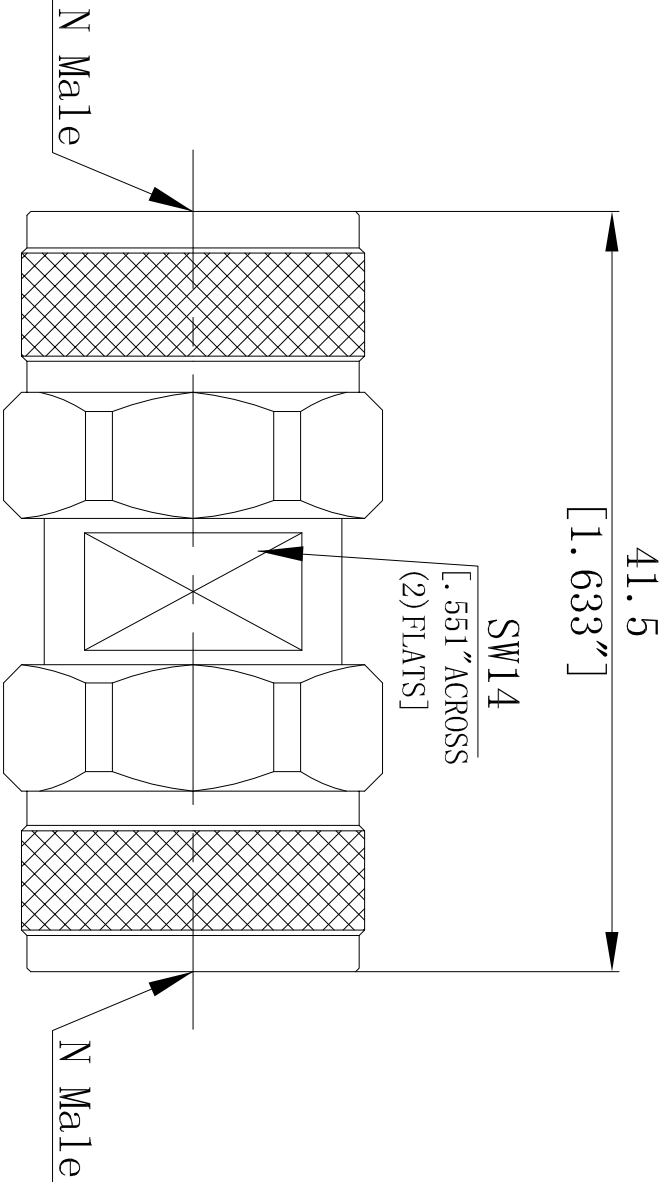

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~18GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR≤1.15:1@18GHz
- 1.6 INSERTION LOSS: 0.2dB

2.ENVIRONMENTAL:

TEMPERATURE RANGE: -55° to +165°

3.MATERIAL AND FINISH:

- (1) BODY: STAINLESS STEEL, PASSIVATE
- (2) NUT: STAINLESS STEEL, PASSIVATE
- (3) CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- (4) DIELECTRIC: PEI, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.					DMN	DWP	25/07/2015			 Jiangsu Zdec Microwave Technology Co., Ltd.									
DIMENSIONS MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:			APVD			NAME											
		0 P/C ±0.25			PRODUCT SPEC			N Male TO N Male Adapter											
		1 P/C ±0.15			—														
		2 P/C ±0.12			APPLICATION SPEC														
MATERIAL		FINISH			—			SIZE											
SEE TABLE		SEE TABLE			WEIGHT			CAGE CODE			DRAWING NO								
					—			A4			00779			N-JJ					
											SCALE			SHEET			RVE		
											2: 1			1			1		

