

4

3

2

1

D

D

C

C

B

B

A

A

40

[1.575"]


SW14

[.551" ACROSS

(2) FLATS]

N Male

N Female

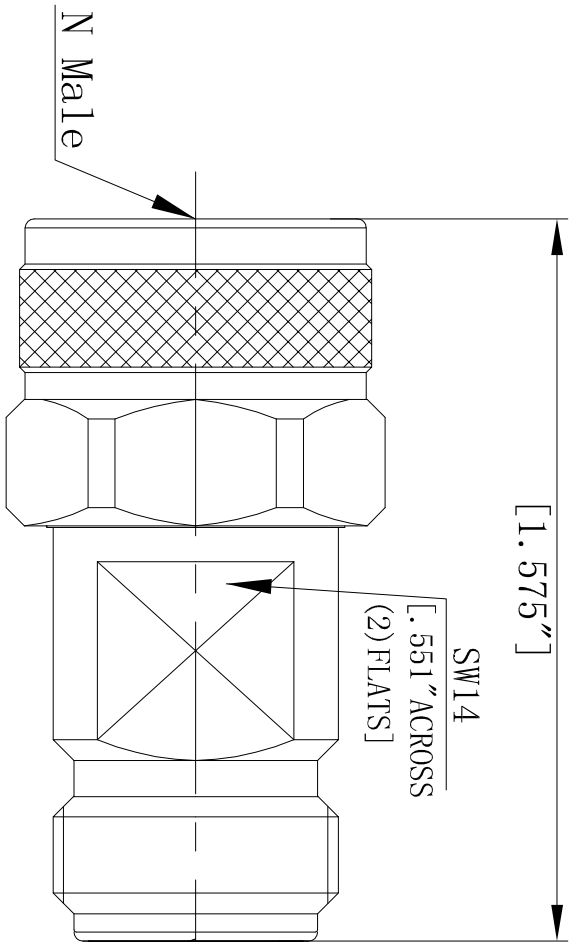

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~18GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR≤1.15:1@18GHz
- 1.6 INSERTION LOSS: 0.2dB

2.ENVIRONMENTAL:

TEMPERATURE RANGE: -55° to +165°

3.MATERIAL AND FINISH:

- (1) BODY: STAINLESS STEEL, PASSIVATE
- (2) NUT: STAINLESS STEEL, PASSIVATE
- (3) CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- (4) DIELECTRIC: PEI, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:

- 0 P/C ±0.25
- 1 P/C ±0.15
- 2 P/C ±0.12
- 3 P/C ±
- 4 P/C ±
- ANGLES ±1°



MATERIAL

SPE TABLE

FINISH

SPE TABLE

DMN DWP 25/07/2015



Jiangsu Zdecl Microwave Technology Co., Ltd.

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

NAME

N Male TO N Female Adapter

SIZE A4

CAGE CODE 00779

DRAWING NO N-JK

SCALE 2: 1

WEIGHT

CUSTOMER DRAWING

SHEET 1

OF 1

R/E 1

4

3

2

1