

REV	DATE	DMN	APVD
—	—	—	—

4

3

2


1

D

D

28

[1.102"]

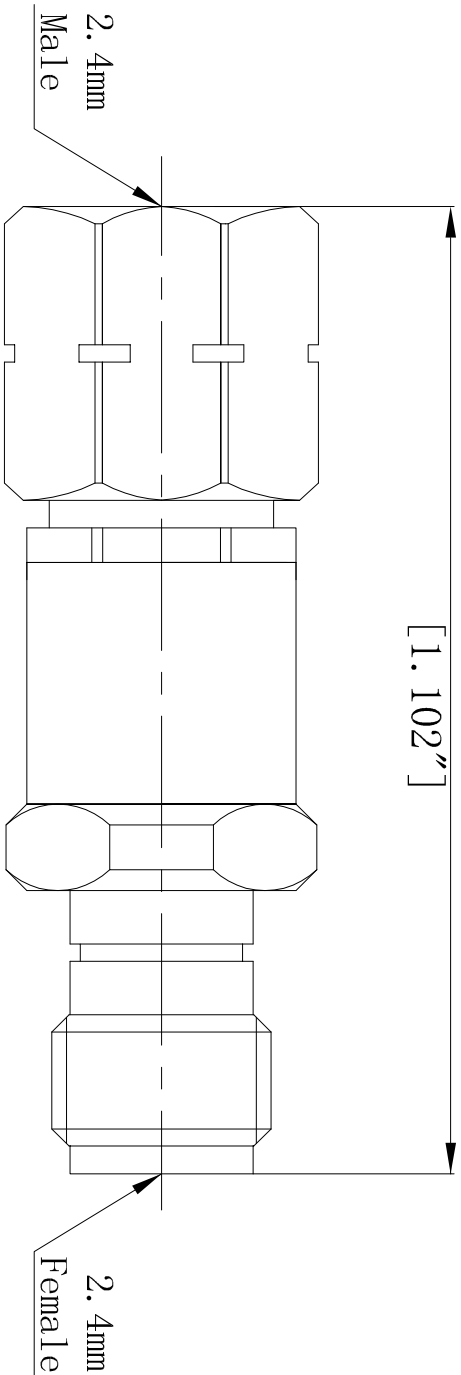

C

C

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~50GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR≤1.20:1@50GHz

2.ENVIRONMENTAL:

- 2.1 TEMPERATURE RANGE: -55° to +165°

3.MATERIAL AND FINISH:

- 3.1 BODY: STAINLESS STEEL, PASSIVATE
- 3.2. NUT: STAINLESS STEEL, PASSIVATE
- 3.3 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.4 DIELECTRIC: PEI, N/A

B

B

4

3

2


1

A

A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS MM



TOLERANCES UNLESS OTHERWISE SPECIFIED:

- 0 P/C ±0.25
- 1 P/C ±0.15
- 2 P/C ±0.12
- 3 P/C ±
- ANGLES 1°

DMN

DWP 17/12/2018

CHK



Jiangsu Zdeci Microwave Technology Co., Ltd.

NAME

2.4mm Male TO 2.4mm Female Adapter

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

SIZE

A4

DWG CODE

00779

DRAWING NO

2.4mm-JK

SCALE

2: 1

SHEET

1

OF

1

R/E

1

SEE TABLE

SEE TABLE

SEE TABLE

SEE TABLE