


LOC	DIST	P	LTR	DATE	DMN	APVD
---	---	---	---	---	---	---

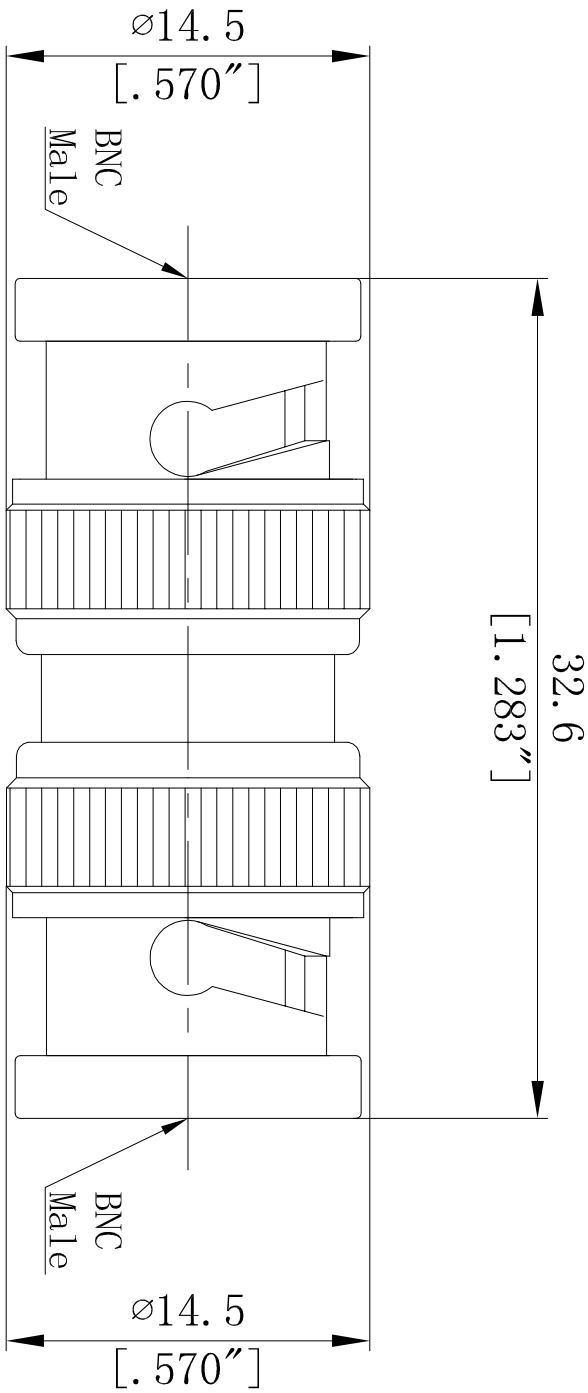

- NOTES:
- 1.ELECTRICAL:
- 1.1 IMPEDANCE: 50Ω
 - 1.2 INSULATION RESISTANCE:5000MΩ MIN
 - 1.3 FREQUENCY RANGE: DC~4GHZ
 - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 750V MAX AT SEA LEVEL
 - 1.5 VSWR≤1.15:1@4GHZ
 - 1.6 INSERTION LOSS: 0.2 dB
- 2.ENVIRONMENTAL:
- 2.1 TEMPERATURE RANGE: -55° to +165°
- 3.MATERIAL AND FINISH:
- 3.1 BODY: BRASS, NICKEL PLATING
 - 3.2 NUT: BRASS, NICKEL PLATING
 - 3.3 CENTER CONTACT: BRASS, NICKEL PLATING
 - 3.4 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: DWP 25/07/2015

CHK: Jiangsu Zhecl Microwave Technology Co., Ltd.

DIMENSIONS	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	NAME
MM	0 PLC ±0.25 1 PLC ±0.15 2 PLC ±0.12 3 PLC ± ANGLES ±1°	---	BNC Male TO BNC Male Adapter

MATERIAL	FINISH	APPLICATION SPEC	SIZE	SCALE
SEE TABLE	SEE TABLE	---	A4	SCALE: 1

WEIGHT	CUSTOMER DRAWING	DRAWING NO	SHEET	OF	RVE
---	---	BNC-50JJJ	1	1	1

4 3 2 1

A B C D