


LOC	DIST	P	LTR	DATE	DMN	APVD
---	---	---	---	---	---	---

REVISIONS

DATE	DMN	APVD
---	---	---

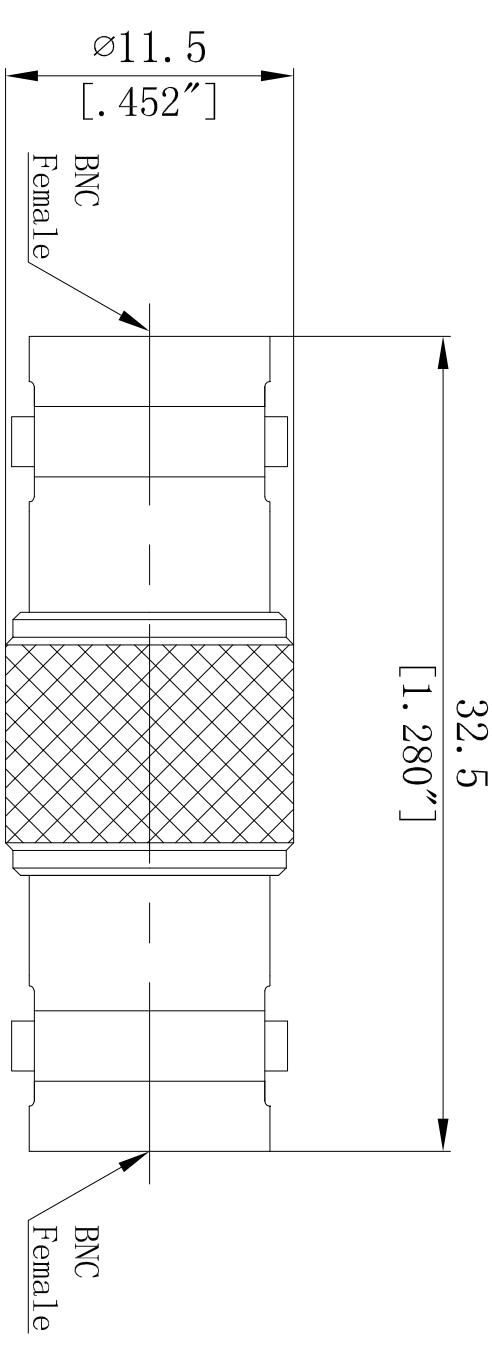

NOTES:

- 1.ELECTRICAL:
 - 1.1 IMPEDANCE: 50Ω
 - 1.2 INSULATION RESISTANCE:5000MΩ MIN
 - 1.3 FREQUENCY RANGE: DC~4GHz
 - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 750V MAX AT SEA LEVEL
 - 1.5 VSWR≤1.15:1@4GHz
 - 1.6 INSERTION LOSS: 0.2 dB

- 2.ENVIROMENTAL:
 - 2.1 TEMPERATURE RANGE: -55° to +165°

3.MATERIAL AND FINISH:

- 3.1 BODY: BRASS, NICKEL PLATING
- 3.2 CENTER CONTACT: PHOSPHOR BRONZ, GOLD PLATING
- 3.3 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DVN	DWP	25/07/2015	Jiangsu Zhecl Microwave Technology Co., Ltd.	
DIMENSIONS MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
		0 PLC	+0.25	APVD	BNC Female TD BNC Female Adapter	
		1 PLC	+0.15	PRODUCT SPEC		
		2 PLC	+0.12	APPLICATION SPEC		
		3 PLC	+/-	WEIGHT		
		ANGLES	±1°	CUSTOMER DRAWING		
MATERIAL		FINISH		SIZE	PACKAGE CODE	DRAWING NO
SEE TABLE		SEE TABLE		A4	00779	BNC-50KK
				SCALE	1	SHEET
				OF	1	RVE
				1		1

4 3 2 1