


---	---	---	---	---	---
-----	-----	-----	-----	-----	-----

30.8

[1.212"]

ø14.5
[.571"]

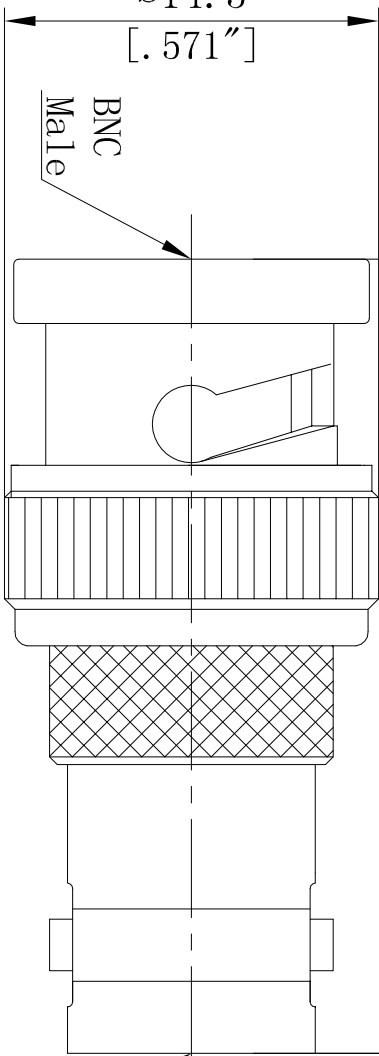

BNC Male

BNC Female

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~4GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 750V MAX AT SEA LEVEL
- 1.5 VSWR≤1.25:1@4GHz
- 1.6 INSERTION LOSS: 0.2dB

2.ENVIROMENTAL:

- 2.1 TEMPERATURE RANGE: -55° to +125°

3.MATERIAL AND FINISH:


- 3.1 BODY: BRASS, NICKEL PLATING NICKEL
- 3.2 NUT: BRASS, NICKEL PLATING
- 3.3 CENTER CONTACT: PHOSPHOR BRONZ, GOLD PLATING
- 3.4 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:

- 0 P/C ±0.25
- 1 P/C ±0.15
- 2 P/C ±0.12
- 3 P/C ±
- 4 P/C ±
- ANGLES ±1°



SPE TABLE

SPE TABLE

DMN

CHK

APPD

NAME

SIZE

GRADE CODE

DRAWING NO

SCALE

SHEET

OF

R/E



Jiangsu Zdecl Microwave Technology Co., Ltd.

BNC Male To BNC Female Adapter

A4

00779

BNC-JK

2: 1

1

1

1

1

4

3

2

1