


LOC		DIST		REVISIONS				
—		—		P	LTR	DATE	DMN	APVD
				—	—	—	—	—

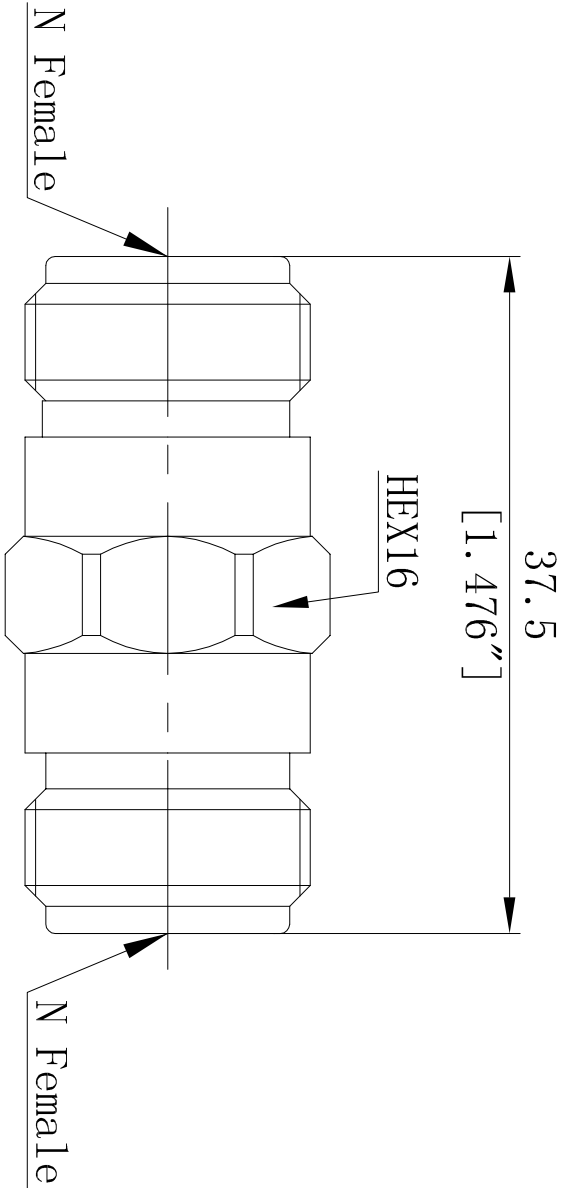

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~18GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR≤1.20:1@18GHz
- 1.6 INSERTION LOSS: 0.2dB

2.ENVIRONMENTAL:

- 2.1 TEMPERATURE RANGE: −55° to +165°

3.MATERIAL AND FINISH:

- 3.1 BODY: STAINLESS STEEL, PASSIVATE
- 3.2 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.3 DIELECTRIC: PEI, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.				DMN	DWP	25/07/2015
DIMENSIONS MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK		
 		0 P/C	±0.25	APVD	NAME  Jiangsu Zdec Microwave Technology Co., Ltd.	
		1 P/C	±0.15	PRODUCT SPEC		
		2 P/C	±0.12	APPLICATION SPEC		
		3 P/C	±-			
MATERIAL		4 P/C	±-	WEIGHT	SIZE	
FINISH		ANGLES	±°	CUSTOMER DRAWING	CAGE CODE	DRAWING NO
SEE TABLE		SEE TABLE			A4	00779
					N-KK	
					SCALE	SHEET
					2: 1	1 of 1
						R/E 1

N Female TO N Female Adapter