


LOC	DIST	P	LTR	DATE	DMN	APVD
—	—	—	—	—	—	—

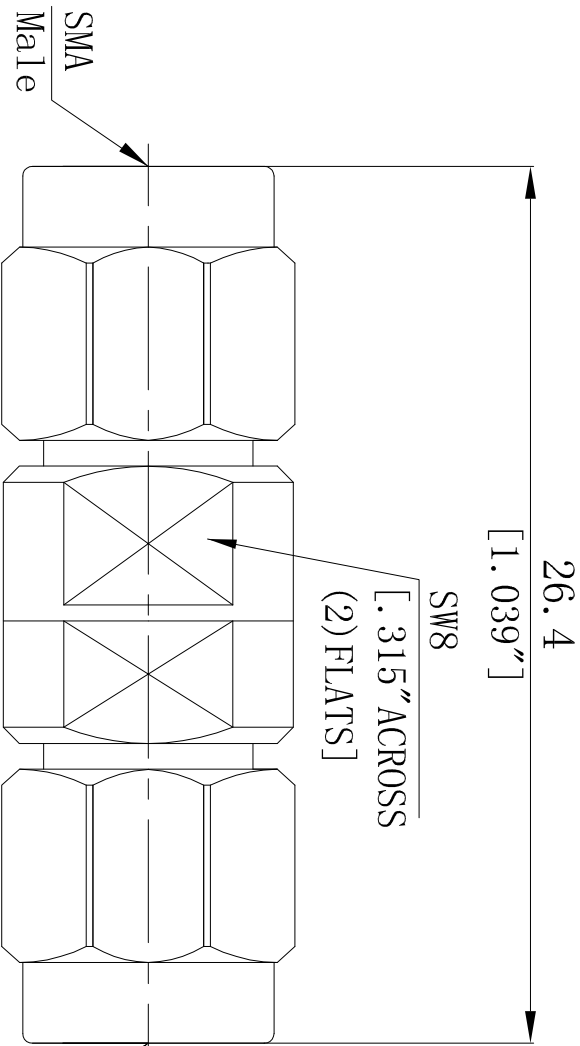

NOTES:

1. ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE: 5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~26.5GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR ≤ 1.20:1 @ 26.5GHz
- 1.6 INSERTION LOSS: 0.3 dB

2. ENVIRONMENTAL:

- 2.1 TEMPERATURE RANGE: -55° to +165°

3. MATERIAL AND FINISH:

- 3.1 BODY: STAINLESS STEEL, PASSIVATE
- 3.2 NUT: STAINLESS STEEL, PASSIVATE
- 3.3 CENTER CONTACT: BRASS, GOLD PLATING
- 3.4 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT. DMN DWP 17/12/2018

Jiangsu ZDeci Microwave Technology Co., Ltd.

SMA Male To SMA Male Adaptor

DIMENSIONS MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPROVAL		NAME	
0 P/C	±0.25	1 P/C	±0.15	APVD		SIZE	A4
2 P/C	±0.12	2 P/C	±	PRODUCT SPEC		DWG CODE	00779
3 P/C	±	FINISH	1*	APPLICATION SPEC		DRAWING NO	SMA-JJ
ANGLES	1*	WEIGHT		CUSTOMER DRAWING		SCALE	2:1
SEE TABLE		SEE TABLE		CUSTOMER DRAWING		SHEET 1 OF 1	