


LOC	DIST	P	LTR	DATE	DMN	APVD
—	—	—	—	—	—	—

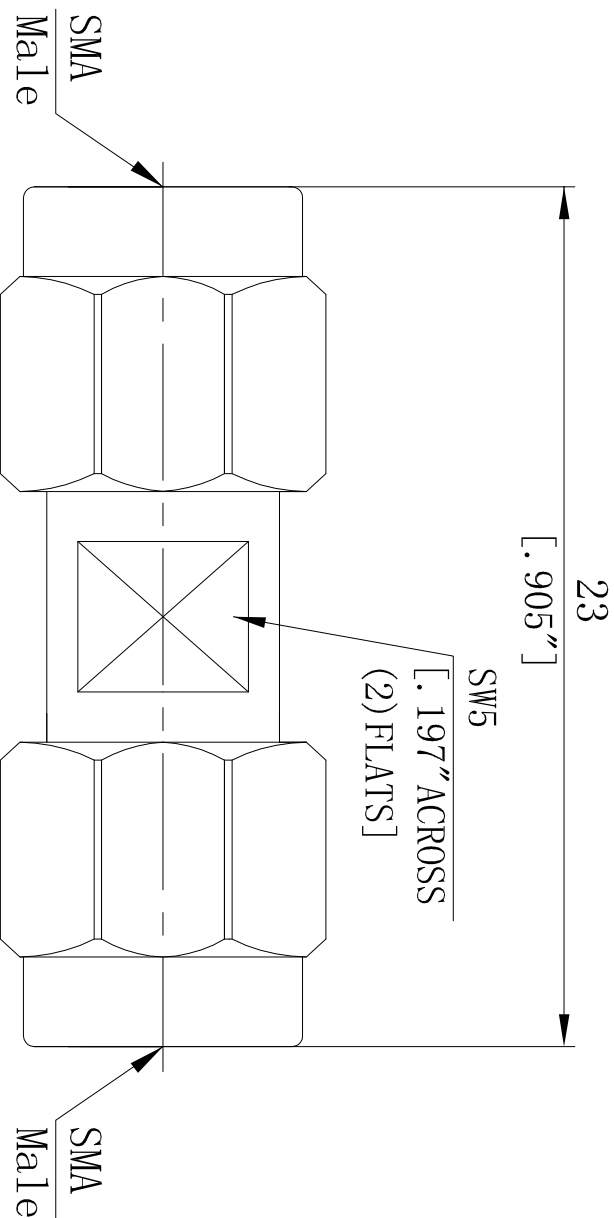

- NOTES:
1. ELECTRICAL:
 - 1.1 IMPEDANCE: 50Ω
 - 1.2 INSULATION RESISTANCE: 5000MΩ MIN
 - 1.3 FREQUENCY RANGE: DC~18GHz
 - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
 - 1.5 VSWR ≤ 1.20:1 @ 18GHz
 - 1.6 INSERTION LOSS: 0.3 dB
 2. ENVIRONMENTAL:
 - 2.1 TEMPERATURE RANGE: -55° to +165°

3. MATERIAL AND FINISH:
 - 3.1 BODY: BRASS, GOLD PLATING
 - 3.2 NUT: BRASS, GOLD PLATING
 - 3.3 CENTER CONTACT: BRASS, GOLD PLATING
 - 3.4 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN	DWP	17/12/2018	Jiangsu ZDeci Microwave Technology Co., Ltd.
DIMENSIONS MM		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD			NAME
0 P/C ±0.25		PRODUCT SPEC		SMA Male To SMA Male Adaptor	
1 P/C ±0.15		APPLICATION SPEC		SIZE	
2 P/C ±0.12		WEIGHT		CAGE CODE	
3 P/C ±		CUSTOMER DRAWING		DRAWING NO	
ANGLES 1°				SMA-JJ-T	
MATERIAL SEE TABLE				SCALE	2: 1
				SHEET	1 OF 1
				R/E	1