


| REV | DATE | DMN | APVD |
|-----|------|-----|------|
| 1 | | | |

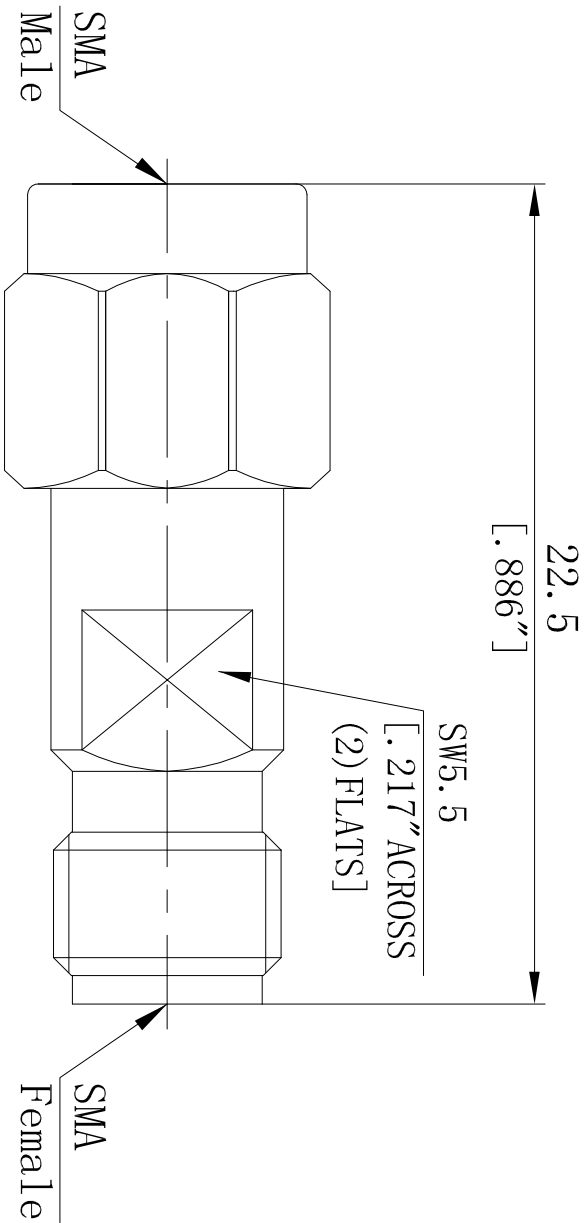

NOTES:

1. ELECTRICAL:
 - 1.1 IMPEDANCE: 50Ω
 - 1.2 INSULATION RESISTANCE: 50000MΩ MIN
 - 1.3 FREQUENCY RANGE: DC~18GHz
 - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
 - 1.5 VSWR≤1.20:1@18GHz
 - 1.6 INSERTION LOSS: 0.3 DB

2. ENVIRONMENTAL:


- 2.1 TEMPERATURE RANGE: -55° to +165°

3. MATERIAL AND FINISH:

- 3.1 BODY: BRASS, GOLD PLATING
- 3.2 NUT: BRASS, GOLD PLATING
- 3.3 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.4 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

| | | |
|--|------------------|--------------------------------|
| DMN | DWP | 17/12/2018 |
| CHK | | |
| APVD | PRODUCT SPEC | NAME |
| | APPLICATION SPEC | SMA Male To SMA Female Adaptor |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | SIZE |
| 0 P/C ±0.25 | 1 P/C ±0.15 | A4 |
| 2 P/C ±0.12 | 3 P/C ± | DWG CODE |
| ANGLES 1° | | 00779 |
| | | DRAWING NO |
| | | SMA-JK-T |



DIMENSIONS MM
MATERIAL SEE TABLE

FINISH SEE TABLE

CUSTOMER DRAWING

SCALE 2: 1 SHEET 1 OF 1 R/E 1

4

3

2

1