


LOC		DIST		REVISIONS				
—		—		P	LTR	DATE	DMN	APVD
				—	—	—	—	—

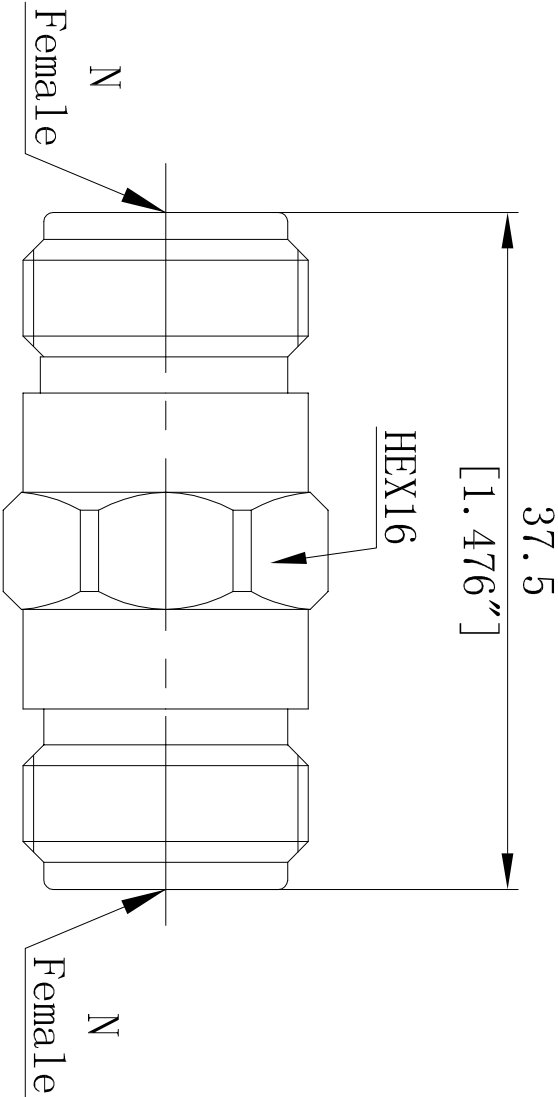

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~6GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR≤1.10:1@6GHz
- 1.6 INSERTION LOSS: 0.2dB

2.ENVIRONMENTAL:

- 2.1 TEMPERATURE RANGE: −55° to +165°

3.MATERIAL AND FINISH:

- 3.1 BODY: BRASS, TERNARY ALLOY PLATING
- 3.2 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.3 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.					DMN	DWP	25/07/2015			
					CHK					
DIMENSIONS MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME					
		0 P/C ±0.25			N Female TO N Female Adapter					
		1 P/C ±0.15								
		2 P/C ±0.12								
		3 P/C ±-								
4 P/C ±-		APPLICATION SPEC			SIZE					
ANGLES ±°		—			A4					
MATERIAL		FINISH			WEIGHT					
—		—			—					
SEE TABLE		SEE TABLE			CUSTOMER DRAWING					
					SCALE 2: 1 SHEET 1 OF 1 RVE 1					



Jiangsu Zdec Microwave Technology Co., Ltd.

N Female TO N Female Adapter

N-KK-T

SCALE

2: 1

SHEET

1

OF

1

R/E

1