


LOC	DIST	P	LTR	DATE	DMN	APVD
—	—	—	—	—	—	—

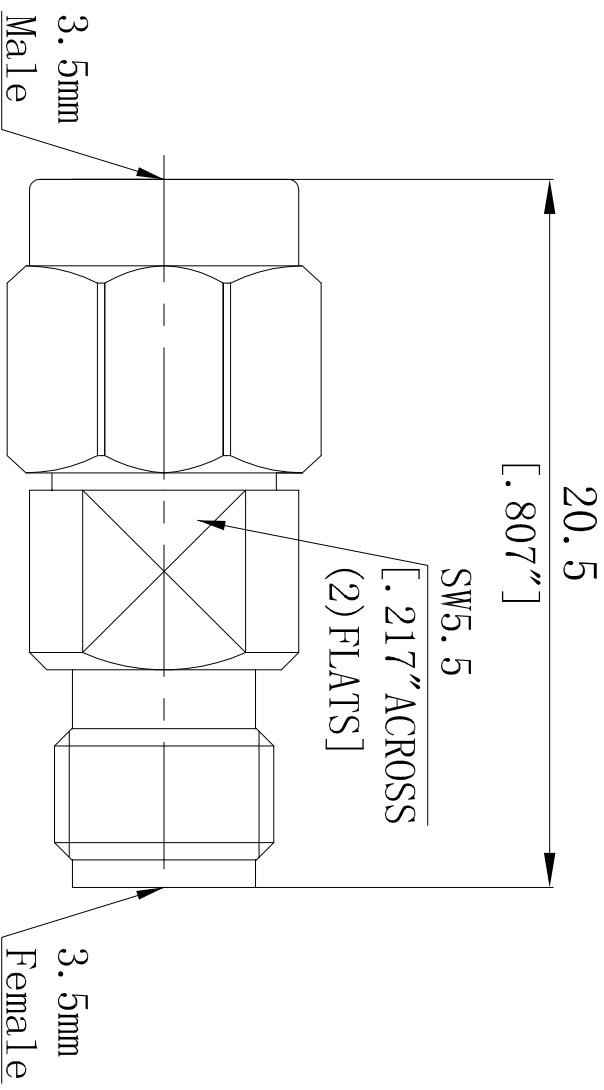

- NOTES:
- ELECTRICAL:
 - IMPEDANCE: 50Ω
 - INSULATION RESISTANCE: 50000MΩ MIN
 - FREQUENCY RANGE: DC~33GHz
 - DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
 - VSWR ≤ 1.25:1 @ 33GHz
 - INSERTION LOSS: 0.3 dB

- ENVIRONMENTAL:
 - TEMPERATURE RANGE: -55° to +165°

- MATERIAL AND FINISH:
 - BODY: STAINLESS STEEL, PASSIVATE
 - NUT: STAINLESS STEEL, PASSIVATE
 - CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
 - DIELECTRIC: PEI, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN	DWP	17/12/2018	Jiangsu Zdecl Microwave Technology Co., Ltd.
DIMENSIONS MM		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	PRODUCT SPEC		NAME
0 P/C ±0.25	1 P/C ±0.15	APPLICATION SPEC		3.5 Male To 3.5 Female Adaptor	
2 P/C ±0.12	3 P/C ±	WEIGHT		SIZE	
4 ANGLES ±1°		CUSTOMER DRAWING		PACKAGE CODE	
FINISH				00779	
MATERIAL				DRAWING NO	
SEE TABLE				3.5-JK	
		SCALE	2: 1	SHEET	1 OF 1
		R/E			1

4 3 2 1