

THIS DRAWING UNPUBLISHED.

RELEASED FOR PUBLICATION

LOC DIST

P LTR

REVISIONS


DATE DMN APVD

19.7

[0.775"]

SW7

[.275" ACROSS
(2) FLATS]

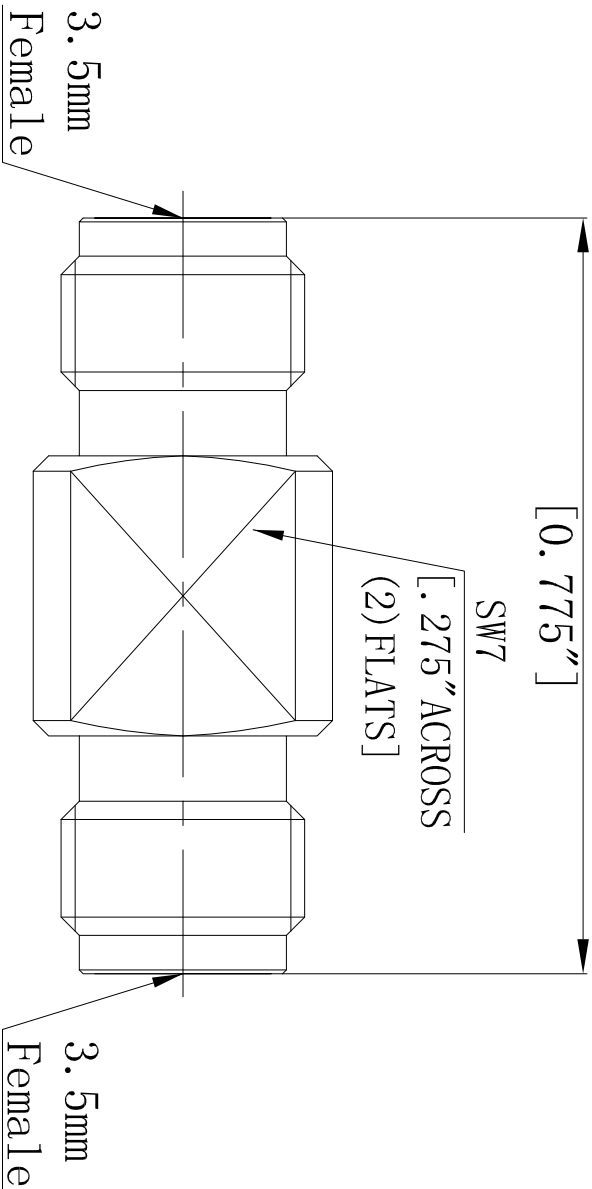

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:50000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~33GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR≤1.25:1@33GHz
- 1.6 INSERTION LOSS: 0.3 dB

2.ENVIRONMENTAL:


- 2.1 TEMPERATURE RANGE: -55° to +165°

3.MATERIAL AND FINISH:

- 3.1 BODY: STAINLESS STEEL, PASSIVATE
- 3.2 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.3 DIELECTRIC: PEI, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS
MM



SEE TABLE

TOLERANCES UNLESS
OTHERWISE SPECIFIED?

0 P/C ±0.25
 1 P/C ±0.15
 2 P/C ±0.12
 3 P/C ±
 ANGLES 1°

SEE TABLE



Jiangsu Zdecl Microwave Technology Co., Ltd.

NAME

3.5 Female To 3.5 Female Adaptor

SIZE TAGE CODE DRAWING NO

A4 00779 3.5mm-KK

CUSTOMER DRAWING

SCALE 2:1 SHEET 1 OF 1 R/E 1

4

3

2

1

A

B

C

D

A

B

C

D