


LOC	DIST	P	LTR	DATE	DMN	APVD
—	—	—	—	—	—	—

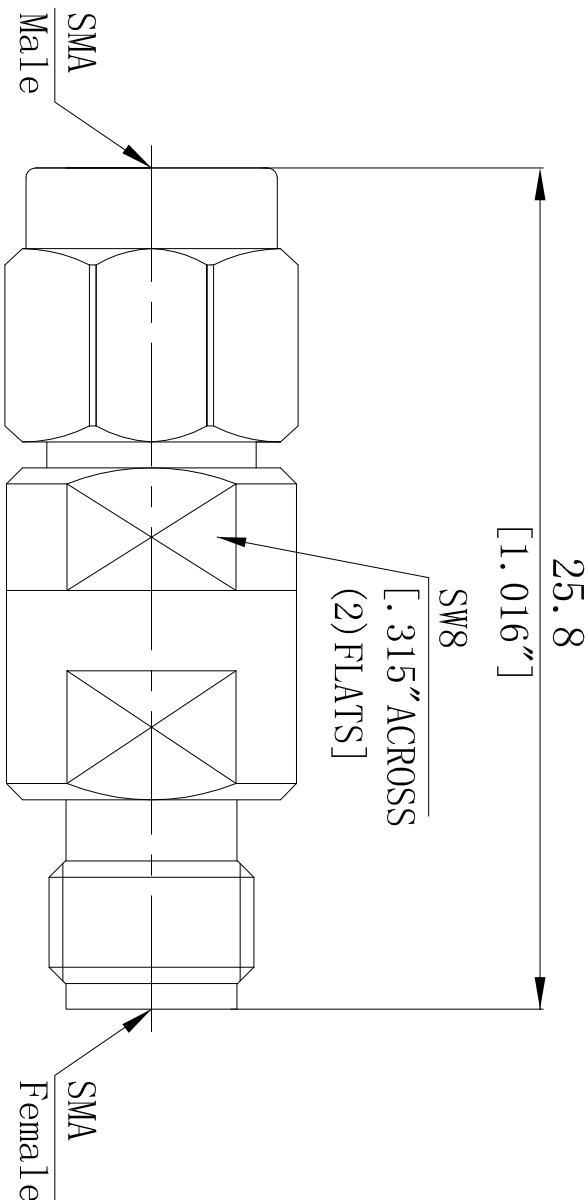

NOTES:

1. ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE: 50000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~26.5GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR≤1.20:1@26.5GHz
- 1.6 INSERTION LOSS: 0.3 dB

2. ENVIRONMENTAL:

- 2.1 TEMPERATURE RANGE: -55° to +165°


3. MATERIAL AND FINISH:

- 3.1 BODY: STAINLESS STEEL, PASSIVATE
- 3.2 NUT: STAINLESS STEEL, PASSIVATE
- 3.3 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.4 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN	DWP	17/12/2018	<p>Jiangsu Zdeci Microwave Technology Co., Ltd.</p>
CHK			
APVD			NAME
PRODUCT SPEC			SMA Male To SMA Female Adaptor
APPLICATION SPEC			
WEIGHT			SIZE
CUSTOMER DRAWING			TAPE CODE
			DRAWING NO
			SCALE
			SHEET
			OF
			R/E

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 P.C. ±0.25
1 P.C. ±0.15
2 P.C. ±0.12
3 P.C. ±
4 ANGLES 1°



SEE TABLE

SEE TABLE

CUSTOMER DRAWING

SIZE TAPE CODE DRAWING NO  
A4 00779 SMA-JK  
SCALE 2: 1 SHEET 1 OF 1 R/E 1