

---	---	---	---	---	---
-----	-----	-----	-----	-----	-----

4

3

2

1

D

D


25

[.984"]

SW8

[.315" ACROSS

(2) FLATS]

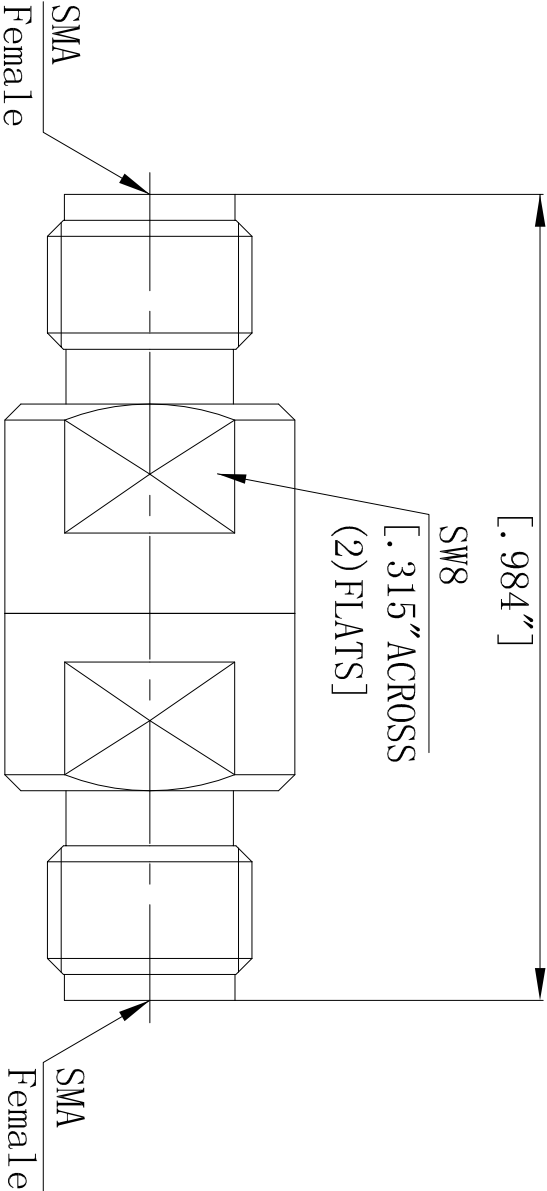

C

C

B

B

- NOTES:
1. ELECTRICAL:
- 1.1 IMPEDANCE: 50Ω
  - 1.2 INSULATION RESISTANCE: 50000MΩ MIN
  - 1.3 FREQUENCY RANGE: DC~26.5GHz
  - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
  - 1.5 VSWR≤1.20:1@26.5GHz
  - 1.6 INSERTION LOSS: 0.3 dB
2. ENVIRONMENTAL:
- 2.1 TEMPERATURE RANGE: -55° to +165°
3. MATERIAL AND FINISH:
- 3.1 BODY: STAINLESS STEEL, PASSIVATE
  - 3.2 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
  - 3.3 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN	DWP	17/12/2018
CHK		

APVD	NAME
	Jiangsu Zdecl Microwave Technology Co., Ltd.

PRODUCT SPEC	NAME
	SMA Female To SMA Female Adaptor

APPLICATION SPEC	SIZE	DATE	DRAWING NO.
	A4	00779	SMA-KK

WEIGHT	CUSTOMER DRAWING	SCALE	SHEET	OF	R/E
		2: 1	1	1	1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN	DWP	17/12/2018
CHK		

APVD	NAME
	Jiangsu Zdecl Microwave Technology Co., Ltd.

PRODUCT SPEC	NAME
	SMA Female To SMA Female Adaptor

APPLICATION SPEC	SIZE	DATE	DRAWING NO.
	A4	00779	SMA-KK

WEIGHT	CUSTOMER DRAWING	SCALE	SHEET	OF	R/E
		2: 1	1	1	1

A

A

4

3

2

1