


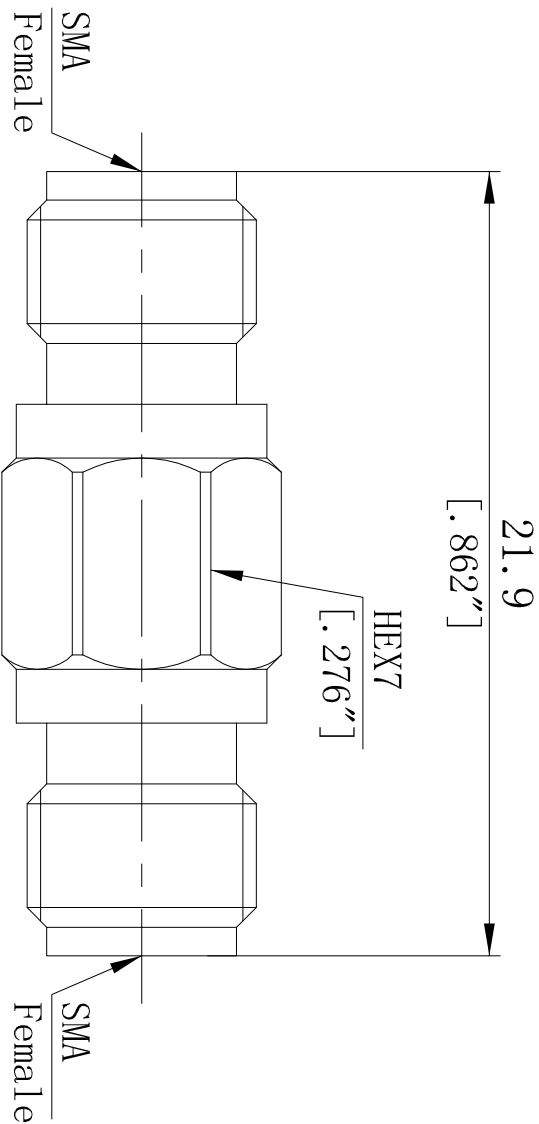

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:50000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~18GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR≤1.15:1@18GHz
- 1.6 INSERTION LOSS: 0.3 dB

2.ENVIRONMENTAL:

- 2.1 TEMPERATURE RANGE: -55° to +165°


3.MATERIAL AND FINISH:

- 3.1 BODY: BRASS, GOLD PLATING
- 3.2 NTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.3 ELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS
MM

TOLERANCES UNLESS
OTHERWISE SPECIFIED:



0 P/C ±0.25
1 P/C ±0.15
2 P/C ±0.12
3 P/C ±
4 ANGLES ±1°

MATERIAL

SEE TABLE

SEE TABLE

SEE TABLE

CUSTOMER DRAWING



Jiangsu Zdecl Microwave Technology Co., Ltd.

NAME

SMA Male To SMA Male Adaptor

APVD

PRODUCT SPEC

APPLICATION SPEC

SIZE

A4

CAGE CODE

00779

DRAWING NO

SMA-KK-T

SCALE

2: 1

SHEET

1

OF

1

R/E

1