


—	—	—	—	—	—
---	---	---	---	---	---

33.3

[1.311"]

SW11

[.433" ACROSS
(2) FLATS]

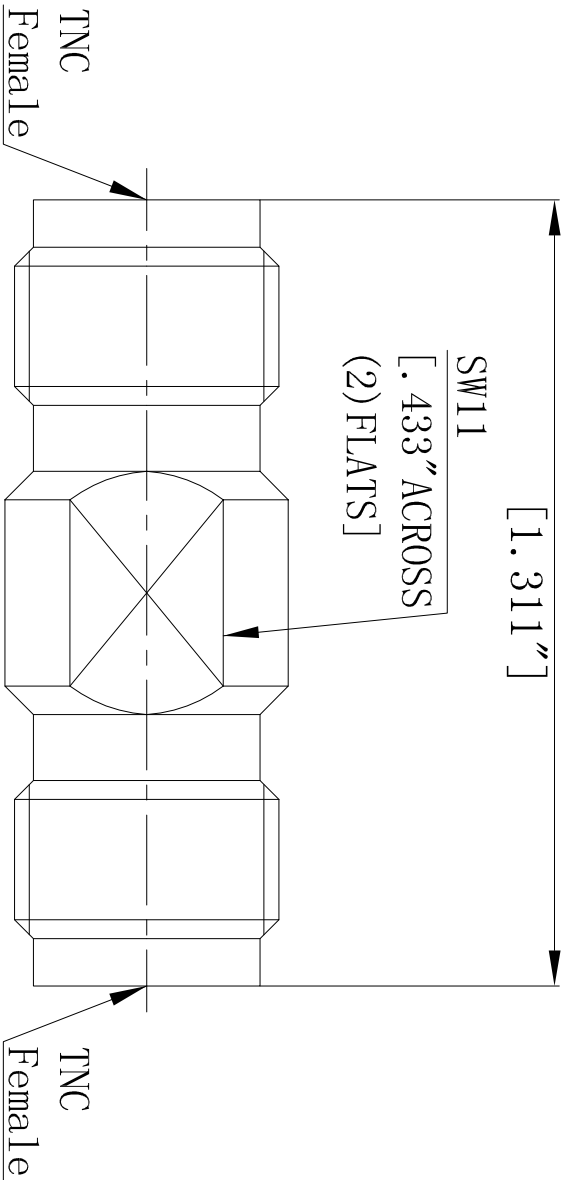

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:50000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~18GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR≤1.25:1@18GHz
- 1.6 INSERTION LOSS: 0.3 dB

2.ENVIROMENTAL:


- 2.1 TEMPERATURE RANGE: -55° to +165°

3.MATERIAL AND FINISH:

- 3.1 BODY: STAINLESS STEEL, PASSIVATE
- 3.2 CENTER CONTACT: BERYLLIUM COPPER,
GOLD PLATING
- 3.3 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS
MM



TOLERANCES UNLESS
OTHERWISE SPECIFIED:

- 0 P/C ±0.25
- 1 P/C ±0.15
- 2 P/C ±0.12
- 3 P/C ±
- 4 ±
- ANGLES ±1°

FINISH

SEE TABLE

SEE TABLE

DMN DcJ 17/12/2018



Jiangsu Zdeci Microwave Technology Co., Ltd.

NAME

TNC Female To TNC Female Adaptor

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

SIZE

A4

DWG CODE

00779

DRAWING NO

TNC-KK

SCALE

2: 1

SHEET

1

OF

1

R/E

1

4

3

2

1

4

3

2

1