


LOC	DIST	P	LTR	DATE	DMN	APVD
—	—	—	—	—	—	—

27

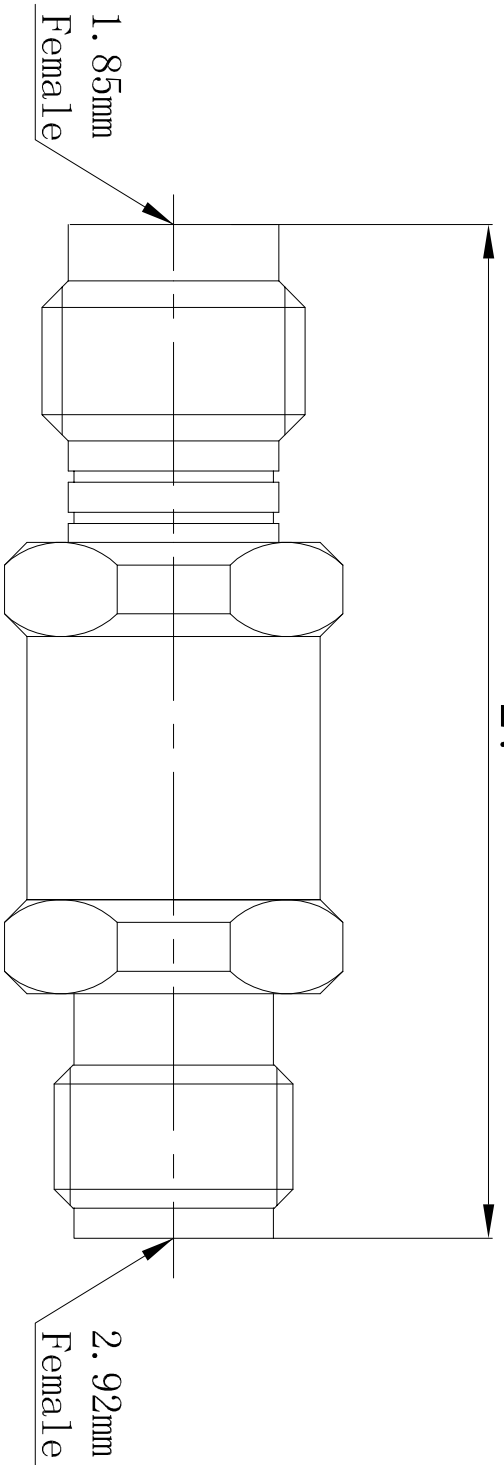

- NOTES:
- 1.ELECTRICAL:
- 1.1 IMPEDANCE: 50Ω
 - 1.2 INSULATION RESISTANCE:5000MΩ MIN
 - 1.3 FREQUENCY RANGE: DC~40GHz
 - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
 - 1.5 VSWR≤1.20:1@40GHz
 - 1.6 INSERTION LOSS: 0.5dB
- 2.ENVIRONMENTAL:
- 2.1 TEMPERATURE RANGE: -55° to +165°
- 3.MATERIAL AND FINISH:
- 3.1 BODY: STAINLESS STEEL, PASSIVATE
 - 3.2 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
 - 3.3 DIELECTRIC: PEI, N/A

3.MATERIAL AND FINISH:

- 3.1 BODY: STAINLESS STEEL, PASSIVATE
- 3.2 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.3 DIELECTRIC: PEI, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DMN	DWP	17/12/2018	Jiangsu Zdeci Microwave Technology Co., Ltd.
0 P.C. ±0.25 1 P.C. ±0.15 2 P.C. ±0.12 3 P.C. ± ANGLES 1°		APVD		CHK			
FINISH		PRODUCT SPEC		APPLICATION SPEC		SIZE	
SEE TABLE		SEE TABLE		CUSTOMER DRAWING		CAGE CODE	
MATERIAL		WEIGHT		DRAWING NO		SCALE	
SEE TABLE		—		1.85mm Female TO 2.92mm Female Adapter		2: 1	
						SHEET 1 OF 1	
						R/E 1	

4

3

2

1