


LOC	DIST	P	LTR	DATE	DMN	APVD
---	---	P	---	---	---	---

27.9

[1.098"]

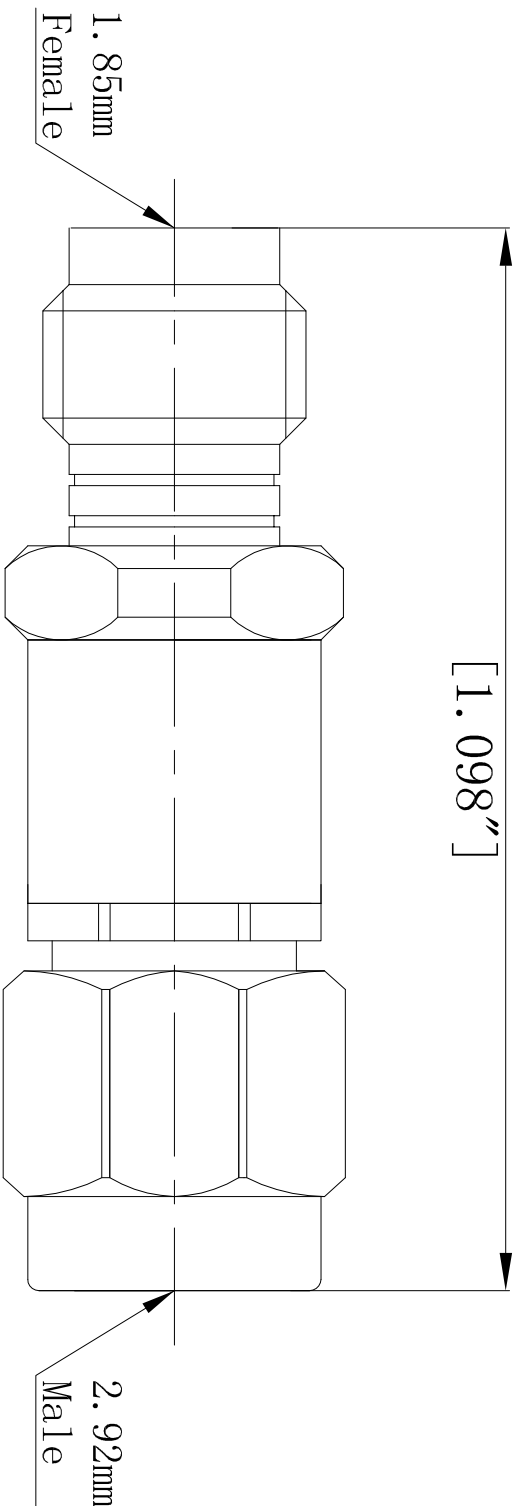

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:50000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~40GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR≤1.20:1@40GHz
- 1.6 INSERTION LOSS: 0.5dB

2.ENVIRONMENTAL:

- 2.1 TEMPERATURE RANGE: -55° to +165°

3.MATERIAL AND FINISH:

- 3.1 BODY: STAINLESS STEEL, PASSIVATE
- 3.2 NUT: STAINLESS STEEL, PASSIVATE
- 3.3 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.4 DIELECTRIC: PEI, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DMN	DWP	17/12/2018	NAME	
0 P/C ±0.25		1 P/C ±0.15		CHK			Jiangsu ZDeci Microwave Technology Co., Ltd.	
2 P/C ±0.12		3 P/C ±		APVD			1.85mm Female TO 2.92mm Male Adapter	
ANGLES ±1°		FINISH		PRODUCT SPEC	APPLICATION SPEC		SIZE	CAGE CODE
SEE TABLE		SEE TABLE		CUSTOMER DRAWING		WEIGHT	A4	00779
MATERIAL		SEE TABLE		DRAWING NO		SCALE	2: 1	SHEET
SEE TABLE		SEE TABLE		1.85/2.92-KJ		OF	1	R/E
4		3		2		1		