


LOC	DIST	P	LTR	DATE	DMN	APVD
—	—	—	—	—	—	—

26.6

[1.047"]

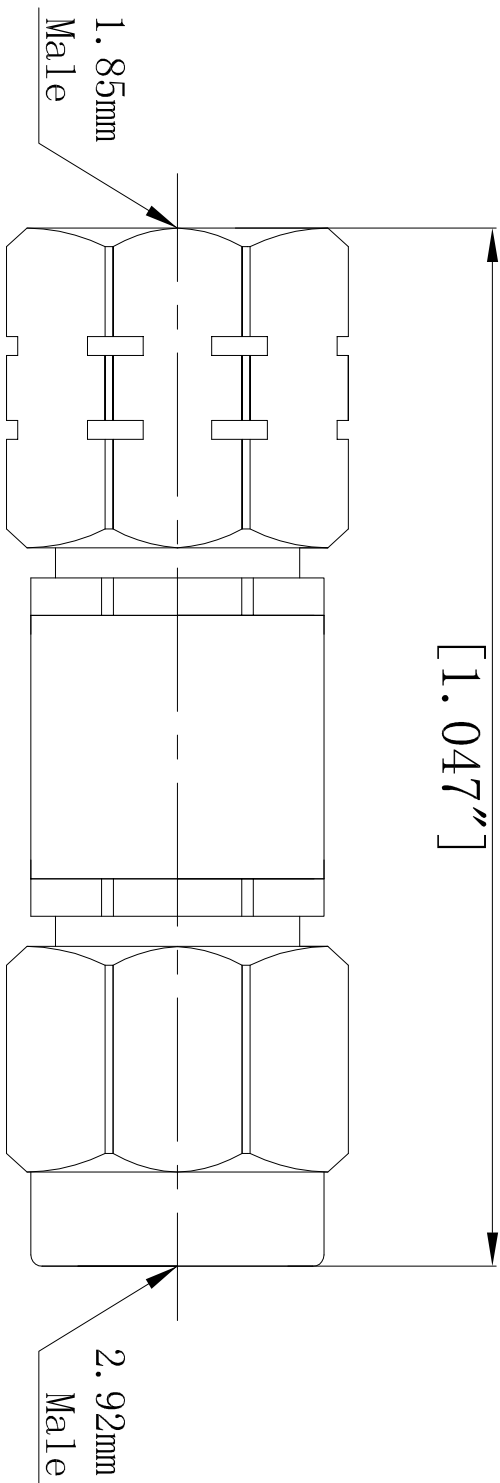

NOTES:

1. ELECTRICAL:
 - 1.1 IMPEDANCE: 50Ω
 - 1.2 INSULATION RESISTANCE: $50000M\Omega$ MIN
 - 1.3 FREQUENCY RANGE: DC~40GHZ
 - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
 - 1.5 VSWR \leq 1.20:1@40GHZ
 - 1.6 INSERTION LOSS: 0.5dB

2. ENVIRONMENTAL:


- 2.1 TEMPERATURE RANGE: -55° to $+165^{\circ}$

3. MATERIAL AND FINISH:

- 3.1 BODY: STAINLESS STEEL, PASSIVATE
- 3.2 NUT: STAINLESS STEEL, PASSIVATE
- 3.3 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.4 DIELECTRIC: PEI, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS	TOLERANCES UNLESS OTHERWISE SPECIFIED:
MM	0 P/C: ± 0.25
	1 P/C: ± 0.15
	2 P/C: ± 0.12
	3 P/C: \pm
	ANGLES: 1°



MATERIAL SEE TABLE
FINISH SEE TABLE

DMN	DWP	17/12/2018
CHK		

APVD	PRODUCT SPEC
	APPLICATION SPEC
	WEIGHT
	CUSTOMER DRAWING

NAME	SIZE	CAGE CODE	DRAWING NO
Jiangsu Zdeci Microwave Technology Co., Ltd.	A4	00779	1.85/2.92-UJ

SCALE	SHEET	OF	R/E
2: 1	1	1	1

4 3 2 1