


LOC	DIST	P	LTR	DATE	DMN	APVD
—	—	P	—	—	—	—

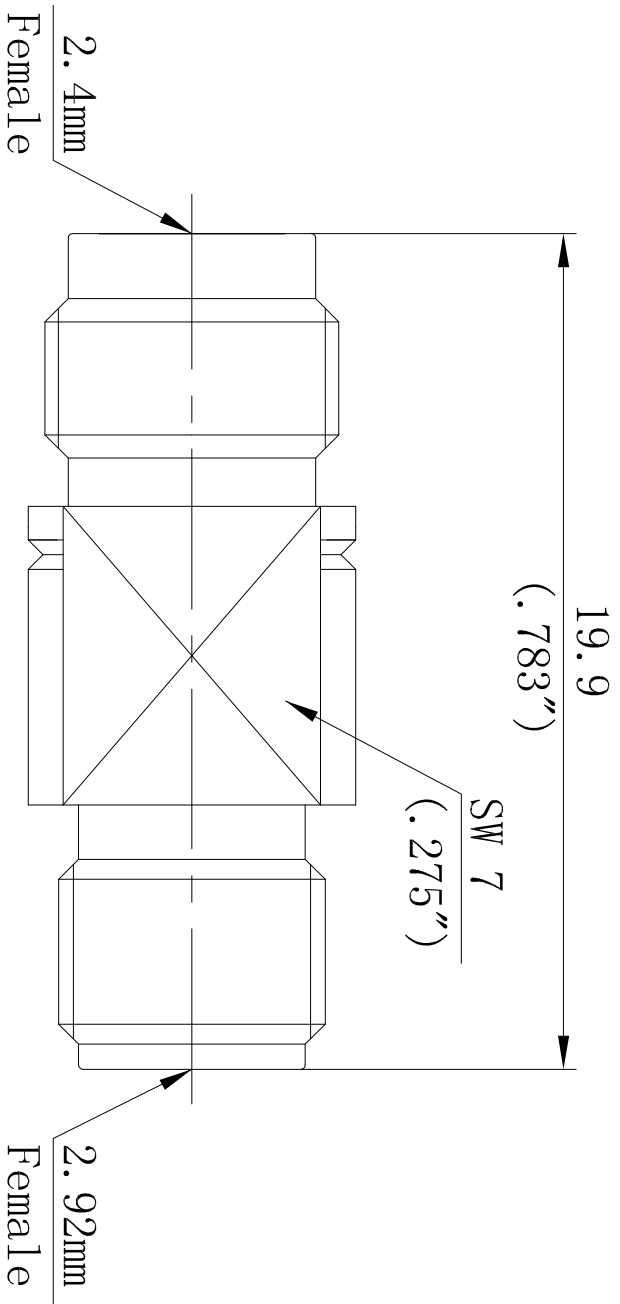

- NOTES:
1. ELECTRICAL:
- 1.1 IMPEDANCE: 50Ω
 - 1.2 INSULATION RESISTANCE: 5000MΩ MIN
 - 1.3 FREQUENCY RANGE: DC~40GHZ
 - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
 - 1.5 VSWR ≤ 1.20:1@40GHZ
 - 1.6 INSERTION LOSS: 0.4dB
2. ENVIRONMENTAL:
- 2.1 TEMPERATURE RANGE: -55° to +165°

3. MATERIAL AND FINISH:
- 3.1 BODY: STAINLESS STEEL, PASSIVATE
 - 3.2 NUT: STAINLESS STEEL, PASSIVATE
 - 3.3 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
 - 3.4 DIELECTRIC: PEEK, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN	DWP	17/12/2018	<p>Jiangsu Zdeci Microwave Technology Co., Ltd.</p>
DIMENSIONS MM		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	PRODUCT SPEC		NAME
0 P/C ±0.25	1 P/C ±0.15	APPLICATION SPEC		2.4mm Female TO 2.92mm Female Adapter	
2 P/C ±	3 P/C ±	WEIGHT		SIZE TAG# CODE DRAWING NO	
ANGLES 1°		CUSTOMER DRAWING		A4 00779 2.4/2.92-KK	
MATERIAL SEE TABLE		FINISH SEE TABLE		SCALE 2:1	SHEET 1 OF 1
				R/E 1	

4 3 2 1