


LOC	DIST	P	LTR	DATE	DMN	APVD
---	---	P	---	---	---	---

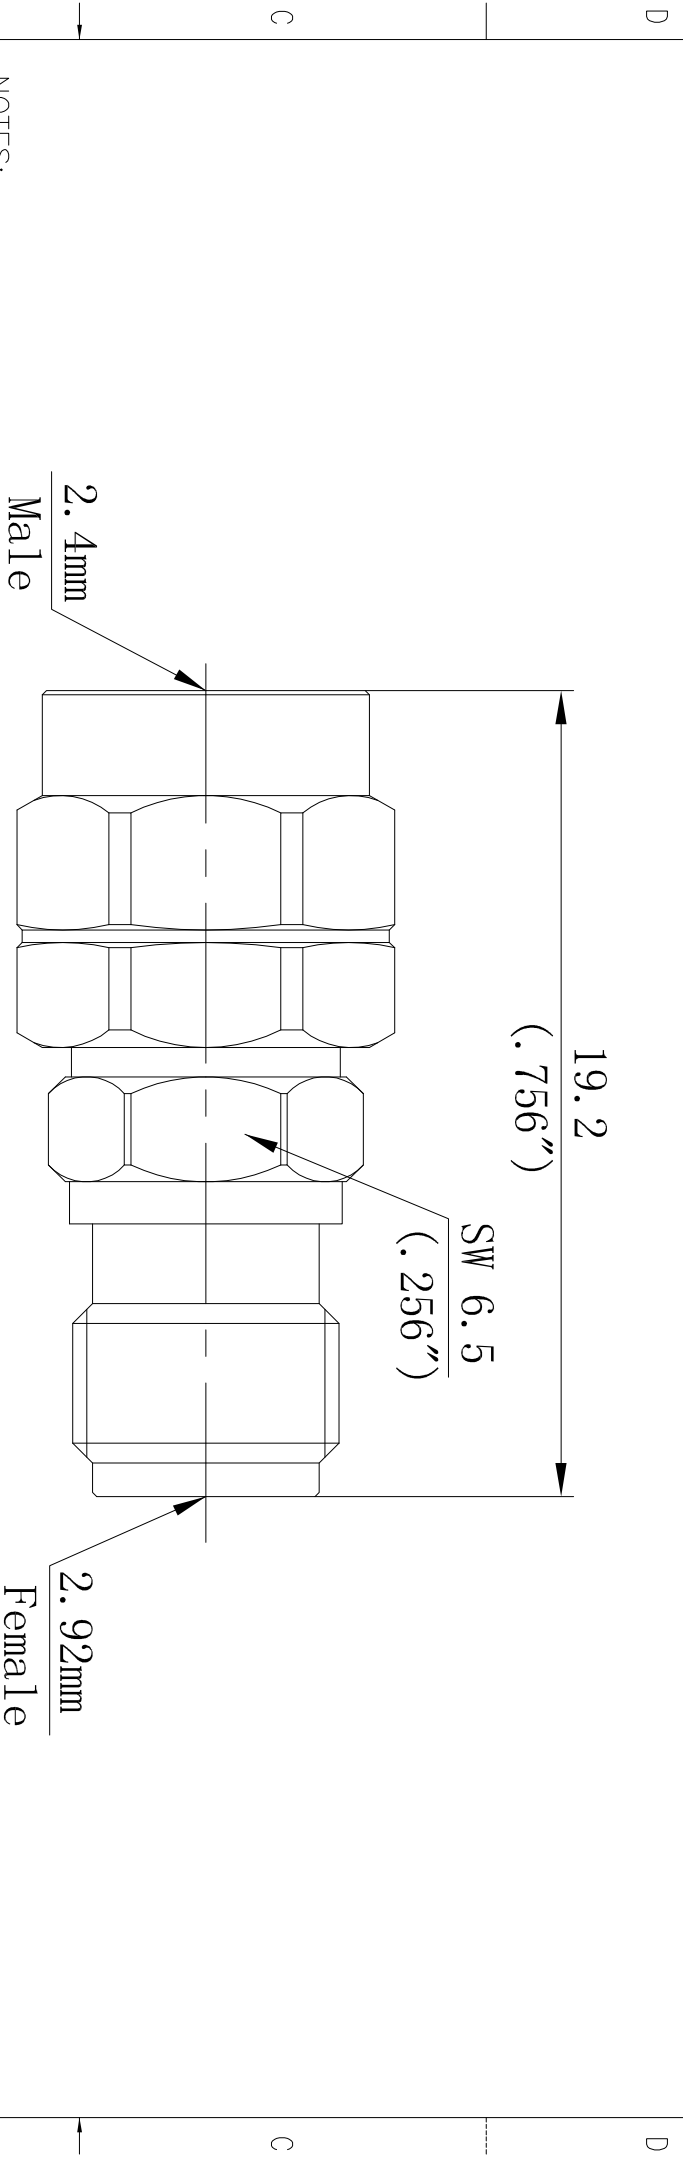

2.4mm
Male

SW 6.5
(.256")

2.92mm
Female

NOTES:

1. ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE: 5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~40GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR ≤ 1.25:1 @ 40GHz
- 1.6 INSERTION LOSS: 0.3dB

2. ENVIRONMENTAL:


- 2.1 TEMPERATURE RANGE: -55° to +165°

3. MATERIAL AND FINISH:

- 3.1 BODY: STAINLESS STEEL TYPE 303, PASSIVATE
- 3.2 NUT: STAINLESS STEEL TYPE 303, PASSIVATE
- 3.3 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.4 DIELECTRIC: PEEK, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN	DWP	17/12/2018	<p>Jiangsu Zdeci Microwave Technology Co., Ltd.</p>
CHK			
DIMENSIONS MM			NAME
TOLERANCES UNLESS OTHERWISE SPECIFIED:			2.4mm Male TO 2.92mm Female Adapter
0 P.C.	±0.25	APVD	
1 P.C.	±0.15	PRODUCT SPEC	
2 P.C.	±0.12	APPLICATION SPEC	
3 P.C.	±	WEIGHT	
ANGLES	±1°	CUSTOMER DRAWING	



SEE TABLE

SEE TABLE

SEE TABLE

SIZE	TAGE CODE	DRAWING NO	SCALE	SHEET	OF	R/E
A4	00779	2.4/2.92-JK	2:1	1	1	1