


LOC	DIST	P	LTR	DATE	DMN	APVD
—	—	—	—	—	—	—

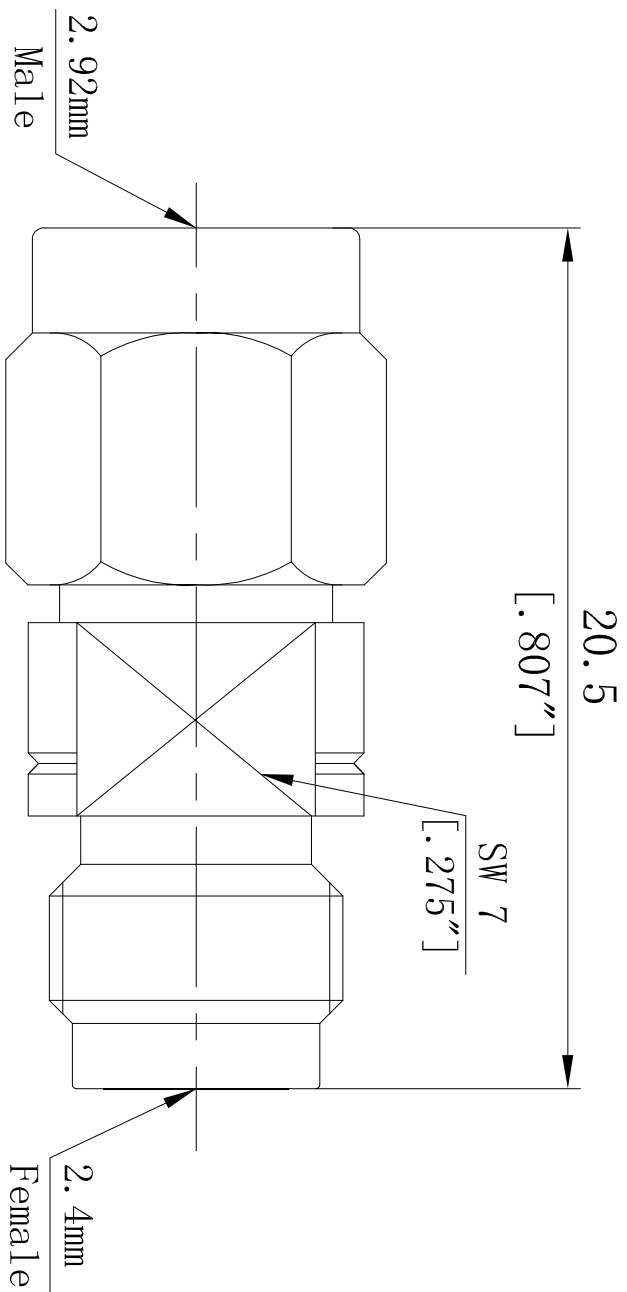

- NOTES:
- 1.ELECTRICAL:
- 1.1 IMPEDANCE: 50Ω
  - 1.2 INSULATION RESISTANCE:5000MΩ MIN
  - 1.3 FREQUENCY RANGE: DC~40GHZ
  - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
  - 1.5 VSWR≤1.25:1@40GHZ
  - 1.6 INSERTION LOSS: 0.3dB
- 2.ENVIROMENTAL:
- 2.1 TEMPERATURE RANGE: -55° to +165°
- 3.MATERIAL AND FINISH:
- 3.1 BODY: STAINLESS STEEL, PASSIVATE
  - 3.2 NUT: STAINLESS STEEL, PASSIVATE
  - 3.3 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
  - 3.4 DIELECTRIC: PEEK, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN	DWP	17/12/2018	<p>Jiangsu Zdeci Microwave Technology Co., Ltd.</p>
CHK			
APVD		NAME	
PRODUCT SPEC		2.4mm Female TO 2.92mm Male Adapter	
APPLICATION SPEC		SIZE	
WEIGHT		CAGE CODE	
CUSTOMER DRAWING		DRAWING NO	
		2.4/2.92-KJ	

THIS DRAWING IS A CONTROLLED DOCUMENT.	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 P/C ±0.25	APPROVAL
DIMENSIONS MM	1 P/C ±0.15	2 P/C ±0.12	PRODUCT SPEC
	3 P/C ±	4 ±	APPLICATION SPEC
	ANGLES 1°		WEIGHT
MATERIAL	FINISH		CUSTOMER DRAWING
SEE TABLE	SEE TABLE		