


4		3		2		1					
THIS DRAWING UNPUBLISHED.		RELEASED FOR PUBLICATION		LOC	DIST	REVISONS			DATE	OWN	APVD
				—	—	P	LWK		—	—	—
							—	—			

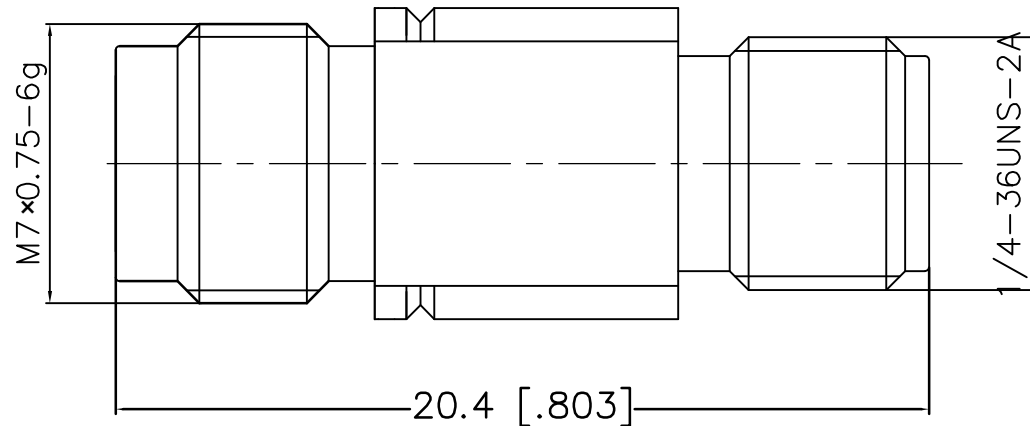

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE: 5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~26.5GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR: ≤1.20

2.ENVIRONMENTAL:

- 2.1 TEMPERATURE RANGE: -55° to +165°
- 2.2 DURABILITY: 500 CYCLES

3.MATERIAL AND FINISH:

BODY: BRASS, STAINLESS STEEL, PASSIVATE
CENTER CONTACT: BERYLLIUM COPPER,
GOLD PLATING
DIELECTRIC: PEI, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN bob	18/02/2018		ZDecI Microwave	
		CHK				
DIMENSIONS MM		TOLERANCES UNLESS OTHERWISE SPECIFIED.			NAME	
		0 PLC ±0.25			PRODUCT SPEC	
		1 PLC ±0.15			APPLICATION SPEC	
		2 PLC ±0.12				
		3 PLC ±				
MATERIAL		FINISH			SIZE	
SEE TABLE		SEE TABLE			A3	
					CAGE CODE	
					00779	
					DRAWING NO	
					2.4/3.5-KK	
					SCALE	
					4: 1	
					SHEET	
					1 OF 1	
					RVE	
					1	
					CUSTOMER DRAWING	