


LOC	DIST	P	LTR	DATE	DMN	APVD
—	—	P	—	—	—	—

19.3  
[.759"]

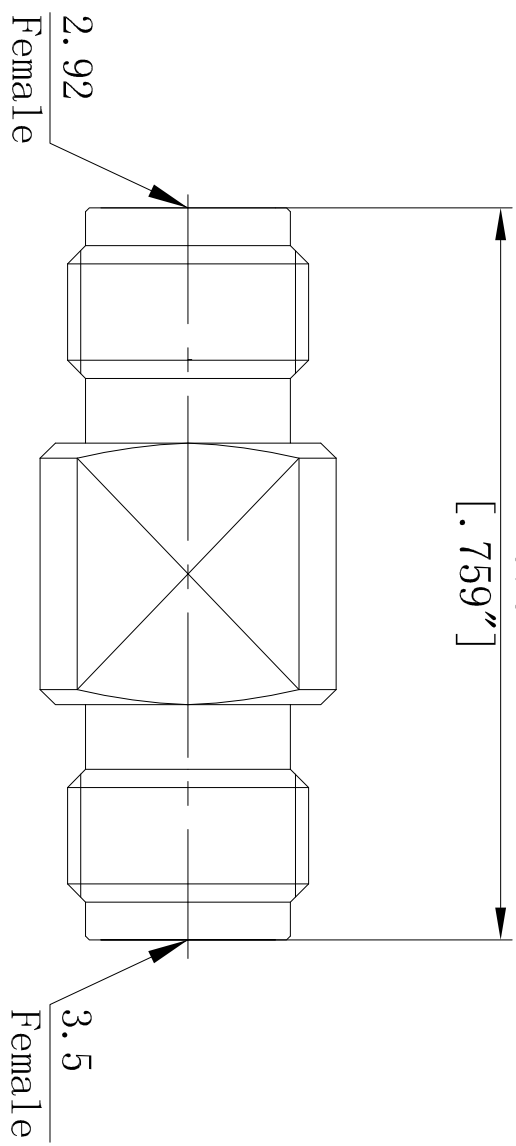

NOTES:

1. ELECTRICAL:
  - 1.1 IMPEDANCE: 50Ω
  - 1.2 INSULATION RESISTANCE: 50000MΩ MIN
  - 1.3 FREQUENCY RANGE: DC~26.5GHz
  - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
  - 1.5 VSWR ≤ 1.20:1 @ 26.5GHz
  - 1.6 INSERTION LOSS: 0.3 dB
2. ENVIRONMENTAL:
  - 2.1 TEMPERATURE RANGE: -55° to +165°
3. MATERIAL AND FINISH:
  - 3.1 BODY: STAINLESS STEEL, PASSIVATE
  - 3.2 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
  - 3.3 DIELECTRIC: PEI, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DMN	DWP	17/12/2018	Jiangsu Zdecl Microwave Technology Co., Ltd.
0 P/C	±0.25	1 P/C	±0.15	CHK			
2 P/C	±0.12	2 P/C	±	APVD			NAME
3 P/C	±	3 P/C	±	PRODUCT SPEC			2.92mm Female To 3.5mm Female Adaptor
ANGLES	±1°	FINISH		APPLICATION SPEC			SIZE
				WEIGHT			A4
				CUSTOMER DRAWING			TAGE CODE
							00779
							DRAWING NO
							2.92/3.5-KK
							SCALE
							2: 1
							SHEET
							1
							OF
							1
							R/E
							1