


LOC	DIST	P	LTR	DATE	DMN	APVD
---	---	P	---	---	---	---

REVISIONS

20.3
[.799"]

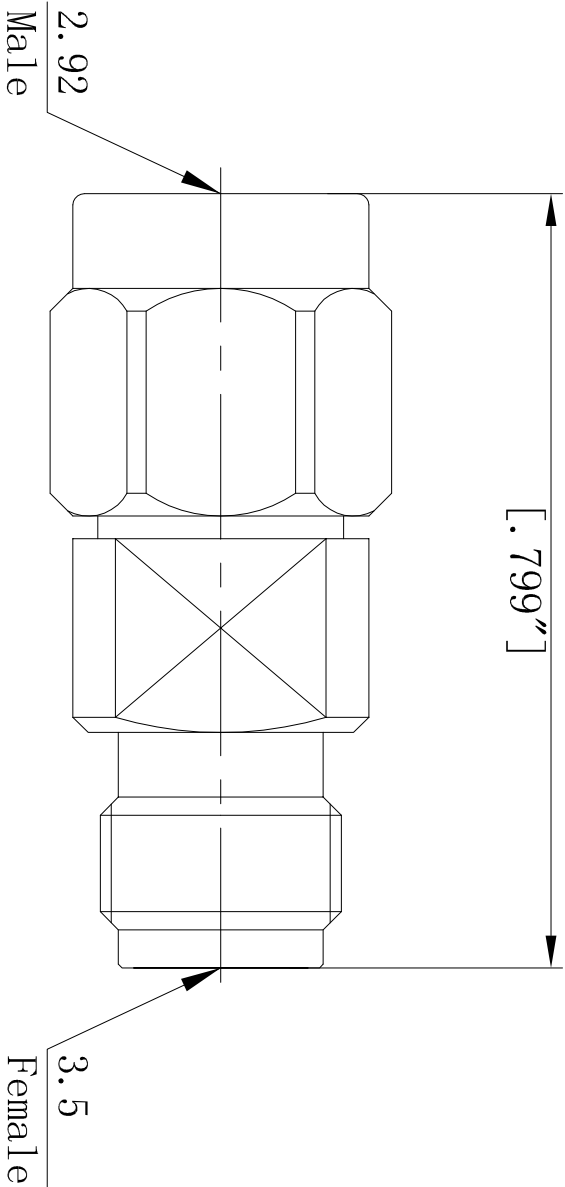

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~33GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR≤1.20:1@33GHz
- 1.6 INSERTION LOSS: 0.3 dB

2.ENVIRONMENTAL:

- 2.1 TEMPERATURE RANGE: -55° to +165°

3.MATERIAL AND FINISH:

- 3.1 BODY: STAINLESS STEEL, PASSIVATE
- 3.2 NUT: STAINLESS STEEL, PASSIVATE
- 3.3 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.4 DIELECTRIC: PEI, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN	DWP	17/12/2018	Jiangsu Zdecl Microwave Technology Co., Ltd.	
DIMENSIONS MM		CHK			NAME	2.92mm Male To 3.5mm Female Adaptor
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD			SIZE	A4
0 P/C	±0.25	PRODUCT SPEC			TAG# CODE	00779
1 P/C	±0.15	APPLICATION SPEC			DRAWING NO	2.92/3.5-UK
2 P/C	±0.12	WEIGHT			SCALE	2: 1
3 P/C	±	CUSTOMER DRAWING			SHEET	1 OF 1
ANGLES	±1°				R/E	1
MATERIAL SEE TABLE						
FINISH SEE TABLE						