


LOC	DIST	P	LTR	DATE	DMN	APVD
—	—	—	—	—	—	—

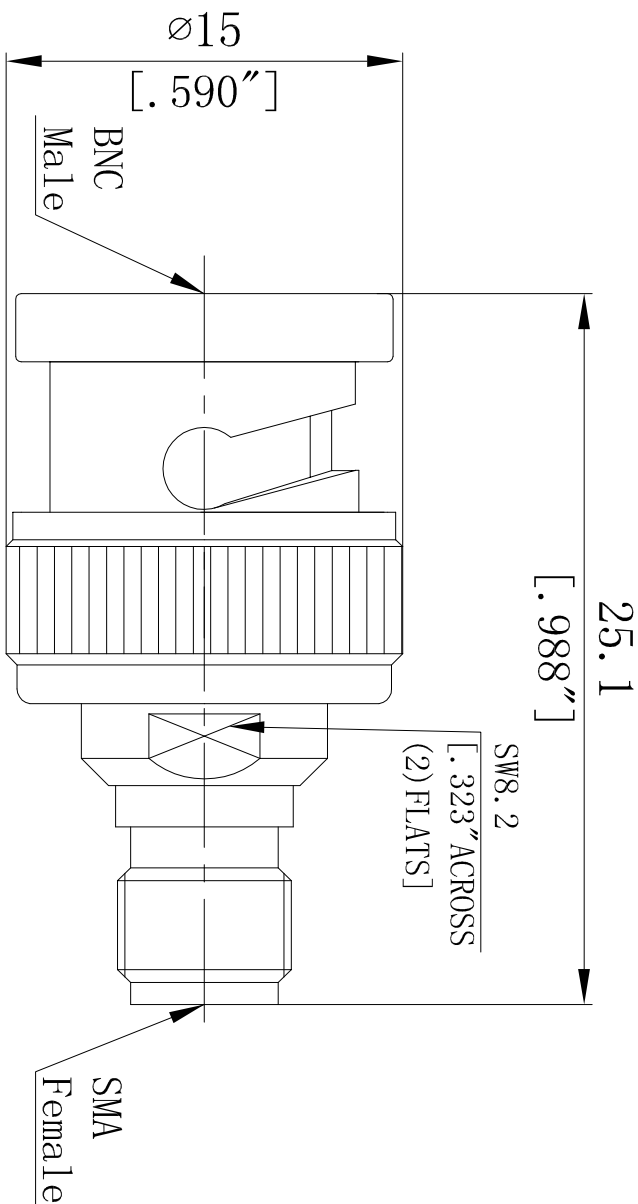

NOTES:

1. ELECTRICAL:
 - 1.1 IMPEDANCE: 50Ω
 - 1.2 INSULATION RESISTANCE: 5000MΩ MIN
 - 1.3 FREQUENCY RANGE: DC~4GHZ
 - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 750V MAX AT SEA LEVEL
 - 1.5 VSWR≤1.25:1@4GHZ
 - 1.6 INSERTION LOSS: 0.3dB

2. ENVIRONMENTAL:

- 2.1 TEMPERATURE RANGE: -55° to +165°

3. MATERIAL AND FINISH:

- 3.1 BODY: BRASS, NICKEL PLATING
- 3.2 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.3 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN DWP 17/12/2018



Jiangsu Zdeci Microwave Technology Co., Ltd.

DIMENSIONS MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:

APVD

NAME

BNC Male To SMA Female Adaptor



PRODUCT SPEC

SIZE

TAKE CODE DRAWING NO



APPLICATION SPEC

WEIGHT

BNC/SMA-JK

SEE TABLE

SEE TABLE

CUSTOMER DRAWING

SCALE

2: 1

SHEET

1

OF

1

R/E

1