


LOC	DIST	P	LTR	DATE	DMN	APVD
—	—	—	—	—	—	—

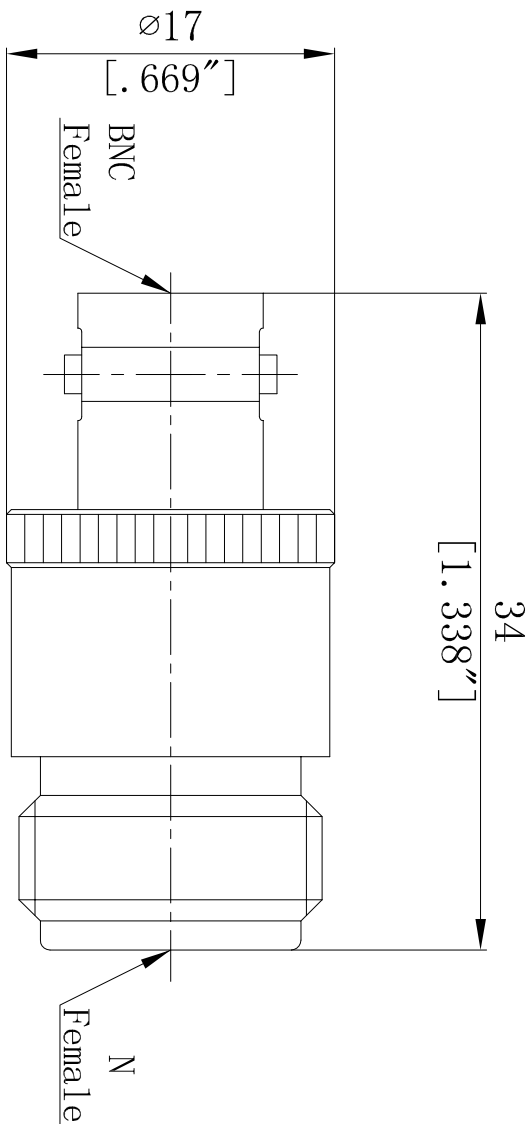

- NOTES:
- ELECTRICAL:
    - IMPEDANCE: 50Ω
    - INSULATION RESISTANCE: 5000MΩ MIN
    - FREQUENCY RANGE: DC~4GHz
    - DILECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
    - VSWR≤1.15:1@4GHz
  - ENVIRONMENTAL:
    - TEMPERATURE RANGE: -55° to +165°
  - MATERIAL AND FINISH:
    - BODY: BRASS, NICKEL PLATING
    - CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
    - DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN	DWP	17/12/2018	Jiangsu ZDeci Microwave Technology Co., Ltd.
CHK			
DIMENSIONS MM			NAME
0 P/C ±0.25 1 P/C ±0.15 2 P/C ±0.12 3 P/C ± ANGLES 1°			N Female TO BNC Female Adaptor
TOLERANCES UNLESS OTHERWISE SPECIFIED:			SIZE
SEE TABLE			A4
FINISH			CAGE CODE
SEE TABLE			00779
APPLICATION SPEC			DRAWING NO
SEE TABLE			N/BNC-KK
WEIGHT			SCALE
SEE TABLE			2: 1
CUSTOMER DRAWING			SHEET
SEE TABLE			1 OF 1
			R/E
			1

4 3 2 1

A B C D