


| LOC | DIST | P | LTR | DATE | DMN | APVD |
|-----|------|---|-----|------|-----|------|
| —   | —    | — | —   | —    | —   | —    |

33.8

[1.331"]

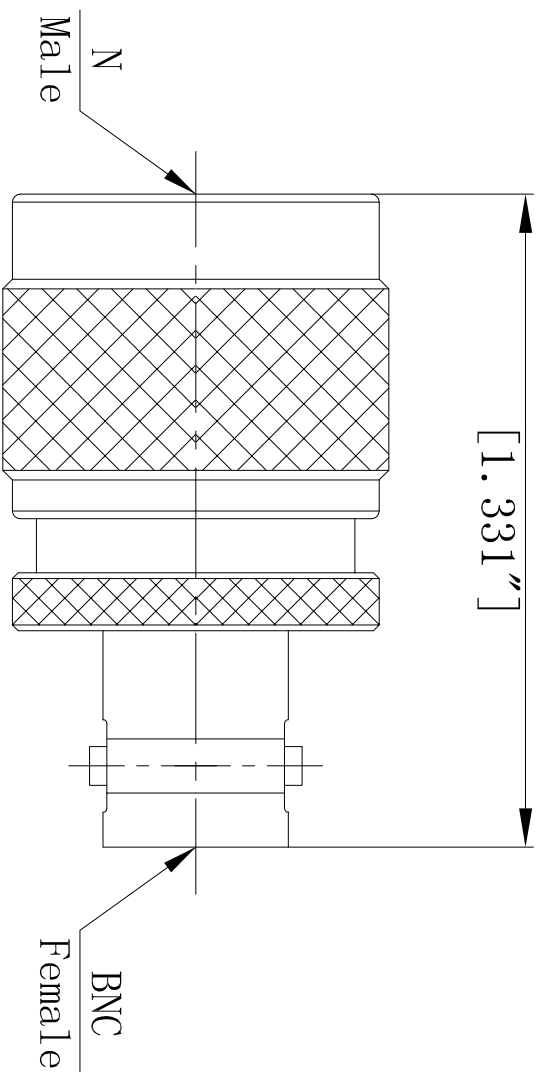

Male

BNC  
Female

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~4GHZ
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR≤1.15:1@4GHZ

2.ENVIRONMENTAL:


- 2.1 TEMPERATURE RANGE: -55° to +165°

3.MATERIAL AND FINISH:

- 3.1 BODY: BRASS, NICKEL PLATING
- 3.2 NUT: BRASS, NICKEL PLATING
- 3.3 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.4 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

| DIMENSIONS | TOLERANCES UNLESS OTHERWISE SPECIFIED: |
|------------|--|
| MM         | 0 P.C. ±0.25                           |
|            | 1 P.C. ±0.15                           |
|            | 2 P.C. ±0.12                           |
|            | 3 P.C. ±                               |
|            | ANGLES 1°                              |



SEE TABLE

|     |     |            |
|-----|-----|------------|
| DMN | DWP | 17/12/2018 |
| CHK |     |            |

APVD

PRODUCT SPEC

APPLICATION SPEC

Jiangsu ZDeci Microwave Technology Co., Ltd.

N Male TO BNC Female Adapter

SIZE A4 TAGE CODE 00779 DRAWING NO N/BNC-JK

WEIGHT CUSTOMER DRAWING SCALE 2: 1 SHEET 1 OF 1 RVE 1

4 3 2 1