


LOC	DIST	P	LTR	DATE	DMN	APVD
---	---	P	---	---	---	---

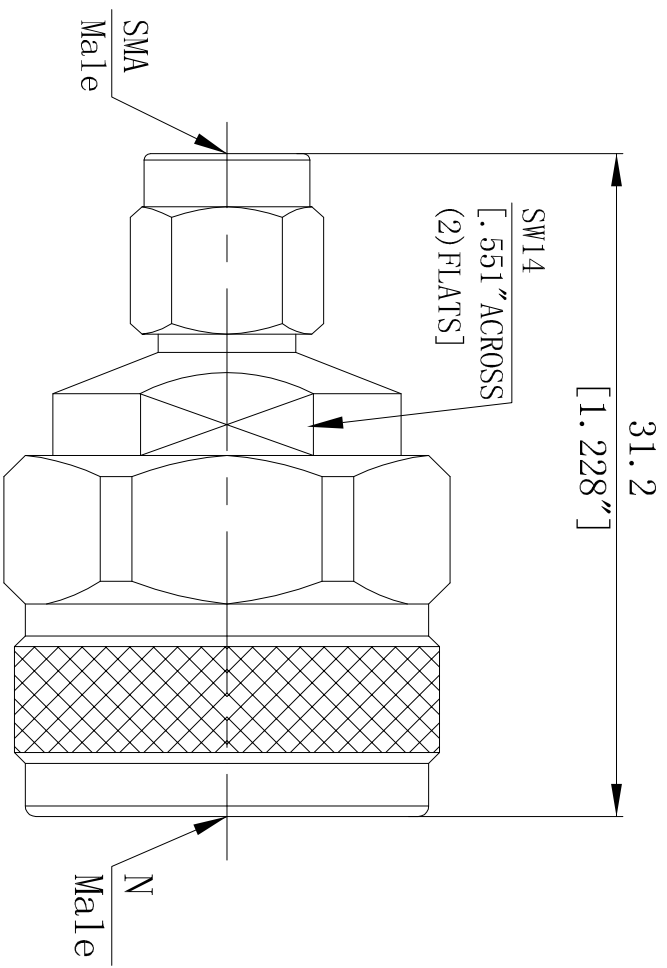

NOTES:

1. ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE: 50000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~6GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR ≤ 1.15:1 @ 6GHz

2. ENVIRONMENTAL:

- 2.1 TEMPERATURE RANGE: -55° to +165°

3. MATERIAL AND FINISH:

- 3.1 BODY: BRASS, TERNARY ALLOY PLATING
- 3.2 NUT: BRASS, TERNARY ALLOY PLATING
- 3.3 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.4 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS	TOLERANCES UNLESS OTHERWISE SPECIFIED:
MM	0 P/C ±0.25
	1 P/C ±0.15
	2 P/C ±0.12
	3 P/C ±
	ANGLES 1°

MATERIAL	FINISH
SEE TABLE	SEE TABLE

DMN	DWP	17/12/2018
CHK		
APVD		
PRODUCT SPEC		
APPLICATION SPEC		
WEIGHT		
CUSTOMER DRAWING		

 Jiangsu Zdeci Microwave Technology Co., Ltd.

NAME: N Male To SMA Male Adaptor

SIZE	CAGE CODE	DRAWING NO
A4	00779	N/SMA-UJ-T

SCALE	SHEET	OF	R/E
2: 1	1	1	1