


LOC	DIST	P	LTR	DATE	DMN	APVD
---	---	P	---	---	---	---

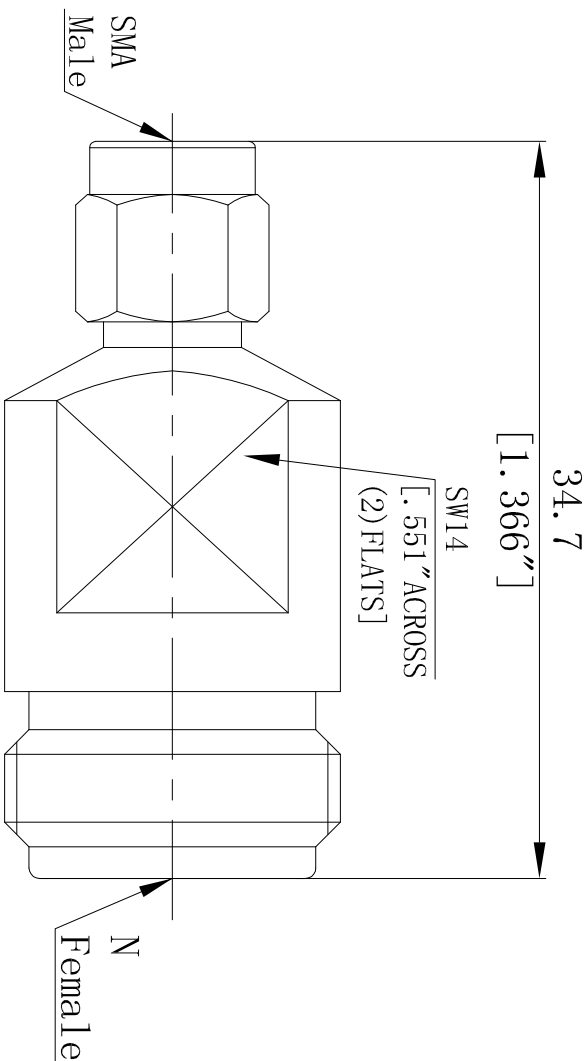

NOTES:

1. ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE: 5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~6GHZ
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR ≤ 1.15:1 @ 6GHZ
- 1.6 INSERTION LOSS: 0.3 dB

2. ENVIRONMENTAL:


- 2.1 TEMPERATURE RANGE: -55° to +165°

3. MATERIAL AND FINISH:

- 3.1 BODY: BRASS, TERNARY ALLOY PLATING
- 3.2 NUT: BRASS, TERNARY ALLOY PLATING
- 3.3 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.4 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS
MM



TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 P/C ±0.25
1 P/C ±0.15
2 P/C ±0.12
3 P/C ±
ANGLES 1°

MATERIAL

SEE TABLE

FINISH

SEE TABLE



Jiangsu Zdecl Microwave Technology Co., Ltd.

NAME

N Female To SMA Male Adaptor

SIZE TAG# CODE DRAWING NO

A4 00779 N/SMA-KJ-T

SCALE 2: 1 SHEET 1 OF 1 R/E 1

4

3

2

1