
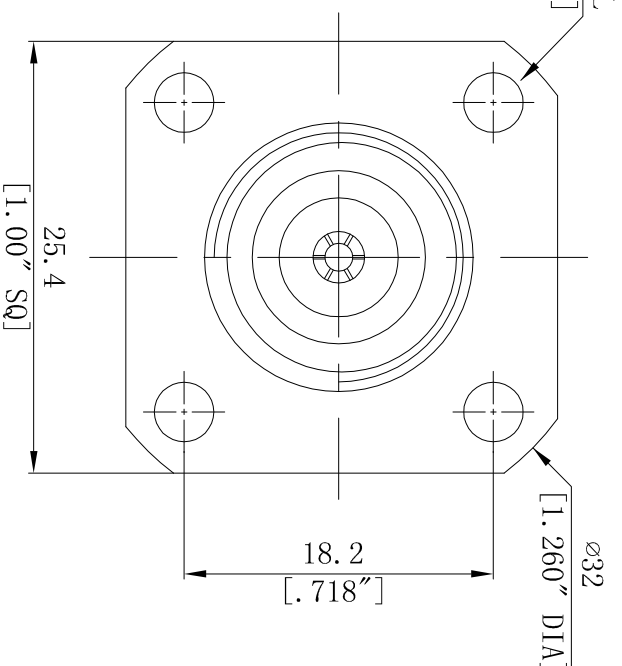


P	LTR	DATE	DMN	APVD
—	—	—	—	—

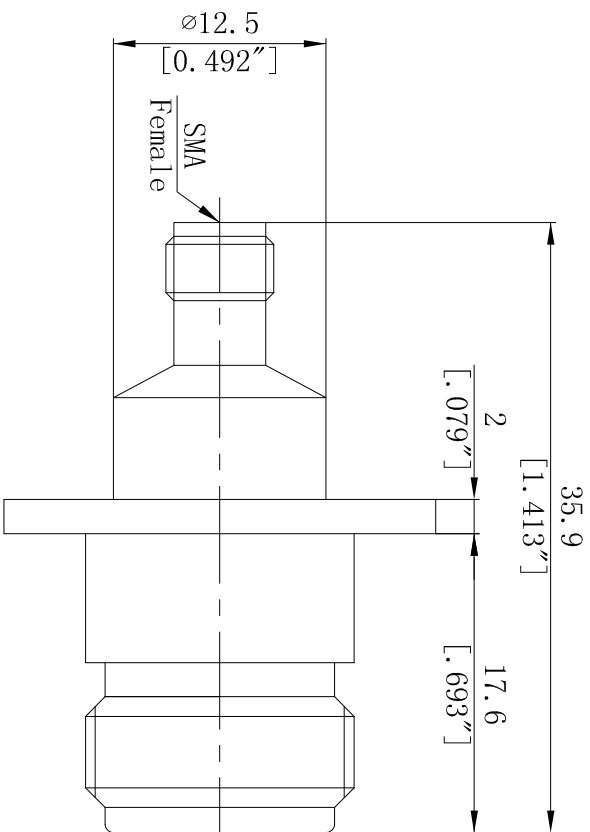

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~6GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR≤1.20:1@6GHz
- 1.6 INSERTION LOSS: 0.3dB

2.ENVIRONMENTAL:


- 2.1 TEMPERATURE RANGE: -55° to +165°

3.MATERIAL AND FINISH:

- 3.1 BODY: BRASS, TERNARY ALLOY PLATING
- 3.2 CENTER CONTACT: BERYLLIUM COPPER, SILVER PLATING
- 3.3 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS	TOLERANCES UNLESS OTHERWISE SPECIFIED:
MM	0 P/C ±0.25
	1 P/C ±0.15
	2 P/C ±0.12
	3 P/C ±
	4 P/C ±
	ANGLES ±1°



SPE TABLE



Jiangsu Zdecl Microwave Technology Co., Ltd.

NAME

SMA Female TO N Female Flange Adapter

SIZE

A4 00779

DRAWING NO

SMA/N-KKF-T2

CUSTOMER DRAWING

SCALE

2: 1 SHEET 1 OF 1 R/E 1