


LOC	DIST	P	LTR	DATE	DMN	APVD
—	—	P	—	—	—	—

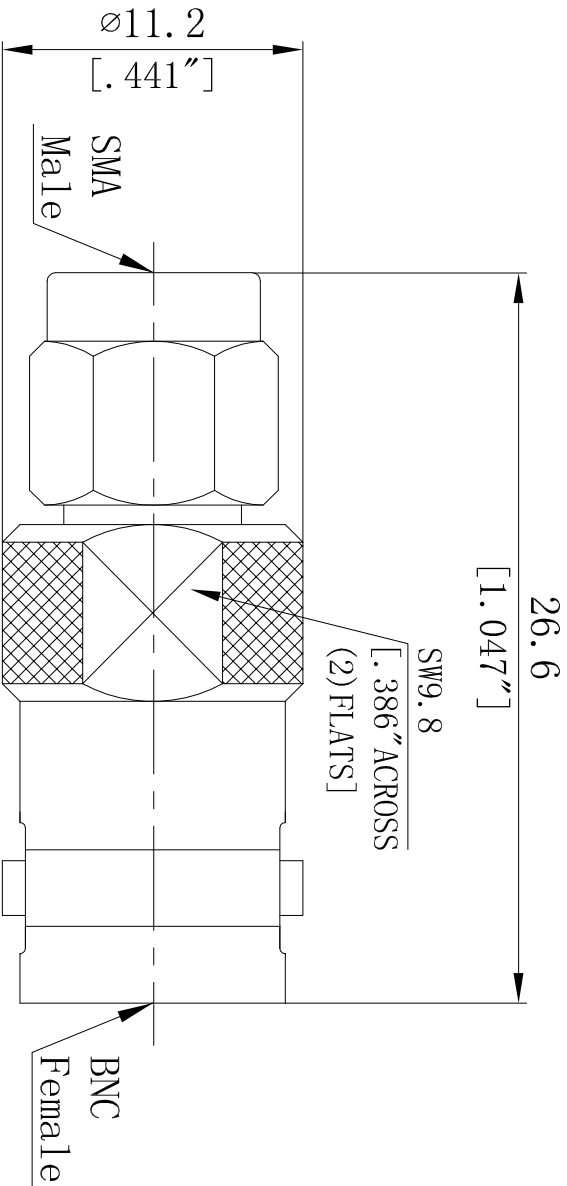

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~4GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 750V MAX AT SEA LEVEL
- 1.5 VSWR≤1.25:1@4GHz
- 1.6 INSERTION LOSS: 0.3dB

2.ENVIROMENTAL:

- 2.1 TEMPERATURE RANGE: -55° to +165°

3.MATERIAL AND FINISH:

- 3.1 BODY: BRASS, NICKEL PLATING
- 3.2 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.3 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DMN	DWP	17/12/2018	Jiangsu Zdecl Microwave Technology Co., Ltd.	
0 P.C. ±0.25		1 P.C. ±0.15		CHK	APVD			NAME
2 P.C. ±0.12		2 P.C. ±		PRODUCT SPEC		SMA Male To BNC Female Adaptor		
3 P.C. ±		3 P.C. ±		APPLICATION SPEC		SIZE TAG# CODE DRAWING NO		
ANGLES ±1°		FINISH		WEIGHT		A4 00779 SMA/BNC-JK		
MATERIAL		SEE TABLE		CUSTOMER DRAWING		SCALE 2: 1 SHEET 1 OF 1 R/E 1		

4 3 2 1