


LOC	DIST	P	LTR	DATE	DMN	APVD
—	—	P	---	---	---	---

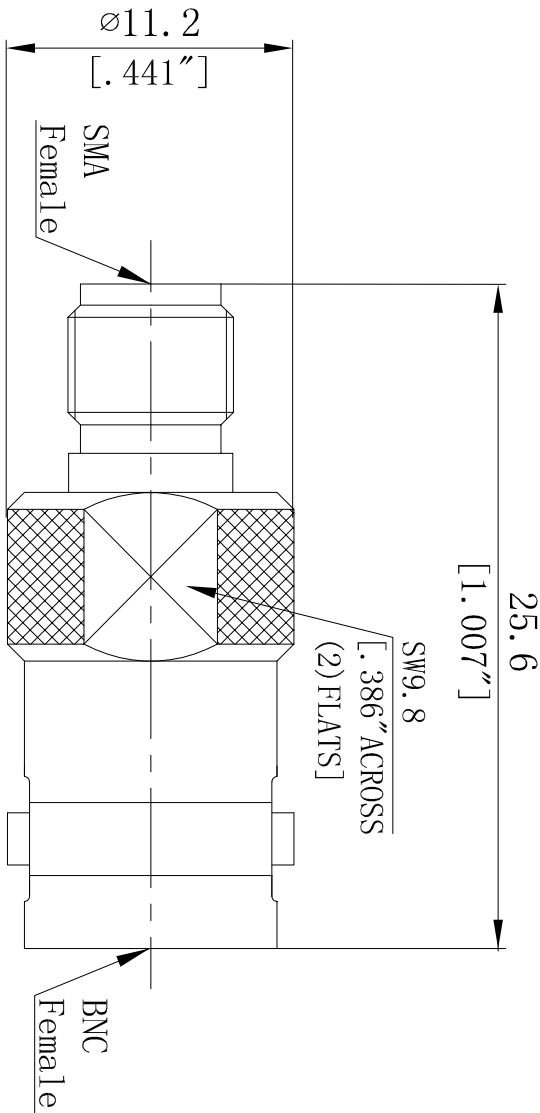

NOTES:

1. ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE: 5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~4GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 750V MAX AT SEA LEVEL
- 1.5 VSWR ≤ 1.25:1 @ 4GHz
- 1.6 INSERTION LOSS: 0.3dB

2. ENVIRONMENTAL:


- 2.1 TEMPERATURE RANGE: -55° to +165°

3. MATERIAL AND FINISH:

- 3.1 BODY: BRASS, NICKEL PLATING
- 3.2 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.3 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN	DWP	17/12/2018	<p>Jiangsu Zdecl Microwave Technology Co., Ltd.</p>
CHK			
APVD	PRODUCT SPEC	NAME	SMA Female To BNC Female Adaptor
FINISH	APPLICATION SPEC	SIZE	A4
SEE TABLE	WEIGHT	DRAWING NO	00779
SEE TABLE	CUSTOMER DRAWING	SCALE	2: 1
		SHEET	1 of 1
		R/E	1



TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 P/C ±0.25
1 P/C ±0.15
2 P/C ±0.12
3 P/C ±
ANGLES 1°

SEE TABLE

SEE TABLE

CUSTOMER DRAWING

SMA/BNC-KK