


LOC	DIST	P	LTR	DATE	DMN	APVD
—	—	—	—	—	—	—

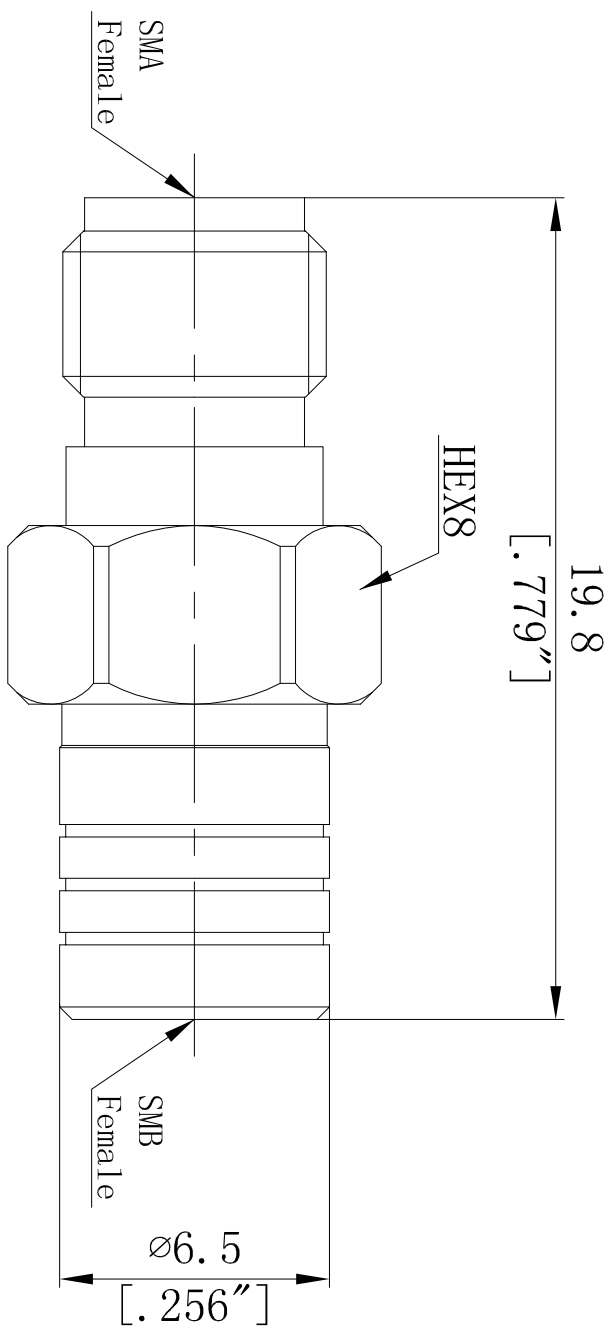

NOTES:

1. ELECTRICAL:
- 1.1 IMPEDANCE: 50Ω
 - 1.2 INSULATION RESISTANCE: 50000MΩ MIN
 - 1.3 FREQUENCY RANGE: DC~6GHz
 - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
 - 1.5 VSWR ≤ 1.25:1 @ 6GHz
 - 1.6 INSERTION LOSS: 0.2 dB

2. ENVIRONMENTAL:

- 2.1 TEMPERATURE RANGE: -55° to +125°

3. MATERIAL AND FINISH:

- 3.1 BODY: BRASS, GOLD PLATING
- 3.2 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.3 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN	DWP	17/12/2018
CHK		

Jiangsu Zdecl Microwave Technology Co., Ltd.

SMA Female To SMB Female Adaptor

APVD	PRODUCT SPEC	NAME	SIZE	DWG CODE	DRAWING NO	SCALE	SHEET	OF	R/E
	APPLICATION SPEC		A4	00779	SMA/SMB-KK	2:1	1	1	1

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 P/C	±0.25
1 P/C	±0.15
2 P/C	±0.12
3 P/C	±
ANGLES	±1°

FINISH	SEE TABLE
WEIGHT	SEE TABLE
CUSTOMER DRAWING	SEE TABLE

