


LOC	DIST	P	LTR	DATE	DMN	APVD
---	---	P	---	---	---	---

30.5

[1.200"]

SW10
[.394" ACROSS
(2) FLATS]

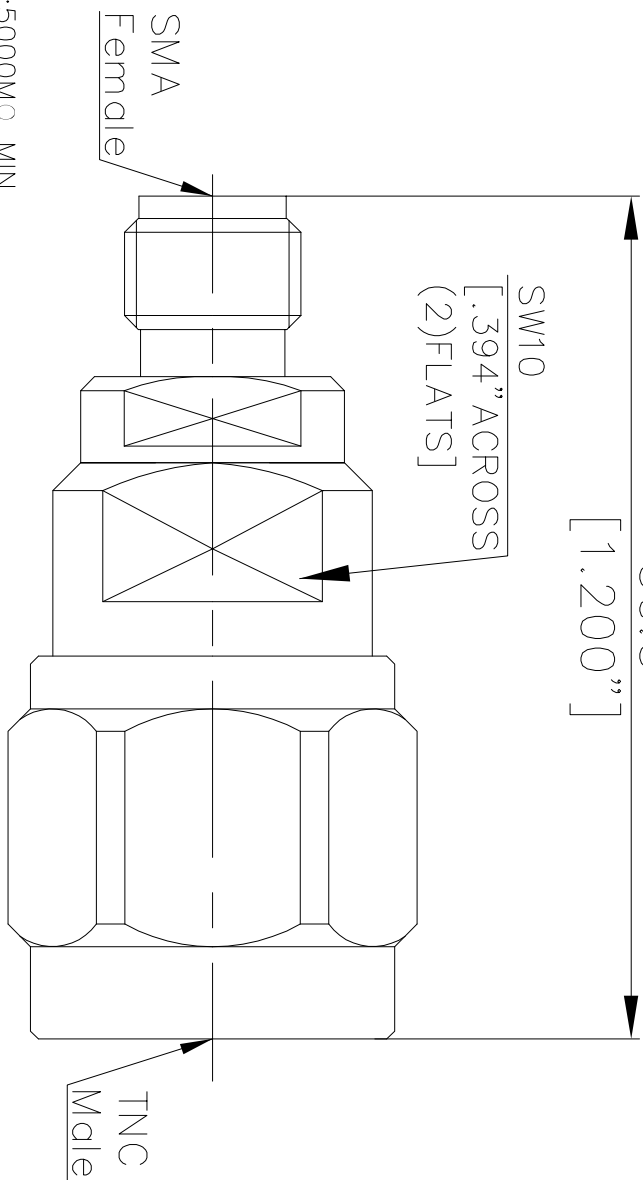

NOTES:

- 1.ELECTRICAL:
- 1.1 IMPEDANCE: 50Ω
 - 1.2 INSULATION RESISTANCE: 50000MΩ MIN
 - 1.3 FREQUENCY RANGE: DC~11GHz
 - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
 - 1.5 VSWR≤1.20:1@11GHz
 - 1.6 INSERTION LOSS: 0.2dB
- 2.ENVIRONMENTAL:
- 2.1 TEMPERATURE RANGE: -55° to +165°
- 3.MATERIAL AND FINISH:
- 3.1 BODY: STAINLESS STEEL, PASSIVATE
 - 3.2 NUT: STAINLESS STEEL, PASSIVATE
 - 3.3 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
 - 3.4 DIELECTRIC: PEI, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN	DWP	17/12/2018	<p>Jiangsu Zdecl Microwave Technology Co., Ltd.</p>
CHK			
DIMENSIONS		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
MM		0 P/C ±0.25	
		1 P/C ±0.15	
		2 P/C ±0.12	
		3 P/C ±	
		4 ±	
		ANGLES 1°	
FINISH		APPLICATION SPEC	
MATERIAL		WEIGHT	
SEE TABLE		CUSTOMER DRAWING	
NAME		SIZE	
SMA Female To TNC Male Adaptor		A4	
DRAWING NO		00779	
SMA/TNC-KJ		SCALE	
		2: 1	
		SHEET	
		1 OF 1	
		R/E	
		1	

4 3 2 1