


LOC	DIST	P	LTR	DATE	DMN	APVD
—	—	—	—	—	—	—

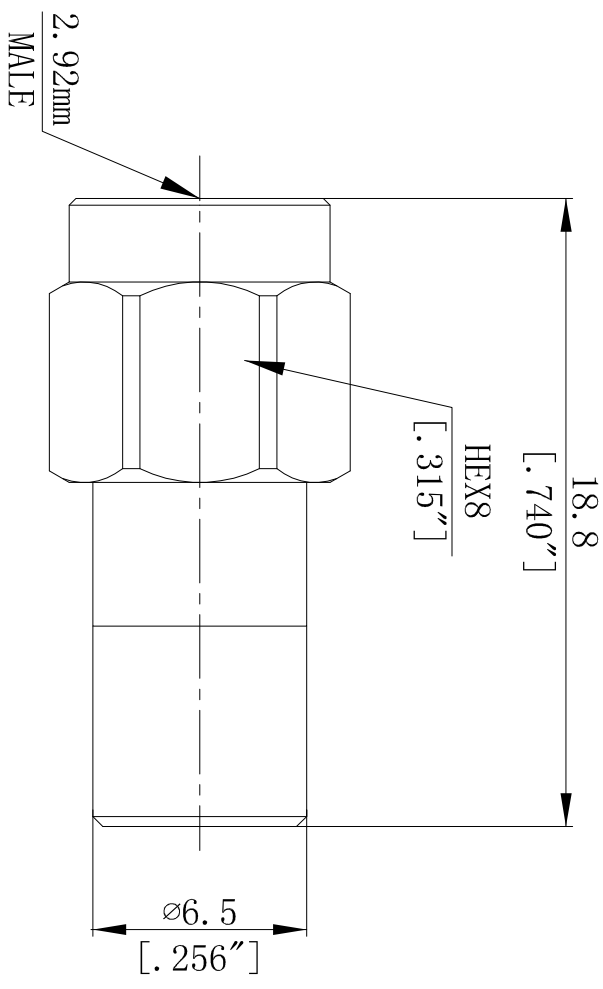

NOTES:

- 1.ELECTRICAL:
- 1.1 IMPEDANCE: 50Ω
 - 1.2 INSULATION RESISTANCE:50000MΩ MIN
 - 1.3 FREQUENCY RANGE: DC~40GHZ
 - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
 - 1.5 VSWR≤1.30:1@40GHZ
 - 1.6 POWER:1W

2.ENVIROMENTAL:

- 2.1 TEMPERATURE RANGE: -55° to +165°

3.MATERIAL AND FINISH:

- 3.1 BODY: STAINLESS STEEL, PASSIVATE
- 3.2 NUT: STAINLESS STEEL, PASSIVATE
- 3.3 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.4 DIELECTRIC: PEI, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN	DWP	17/12/2018
CHK		

DIMENSIONS	TOLERANCES UNLESS OTHERWISE SPECIFIED:
MM	0 P/C ±0.25
	1 P/C ±0.15
	2 P/C ±0.12
	3 P/C ±
	ANGLES ±1°

APVD	PRODUCT SPEC
APPLIC	APPLICATION SPEC
WEIGHT	

APPLIC	CUSTOMER DRAWING
--------	------------------

Jiangsu ZDeci Microwave Technology Co., Ltd.

NAME
2.92 Male Load

SIZE	TAGE CODE	DRAWING NO
A4	00779	2.92JL-40-1W

SCALE	SHEET	OF	R/E
2: 1	1	1	1