


REVISIONS

LOC	DIST	P	LTR	DATE	DMN	APVD
---	---	---	---	---	---	---

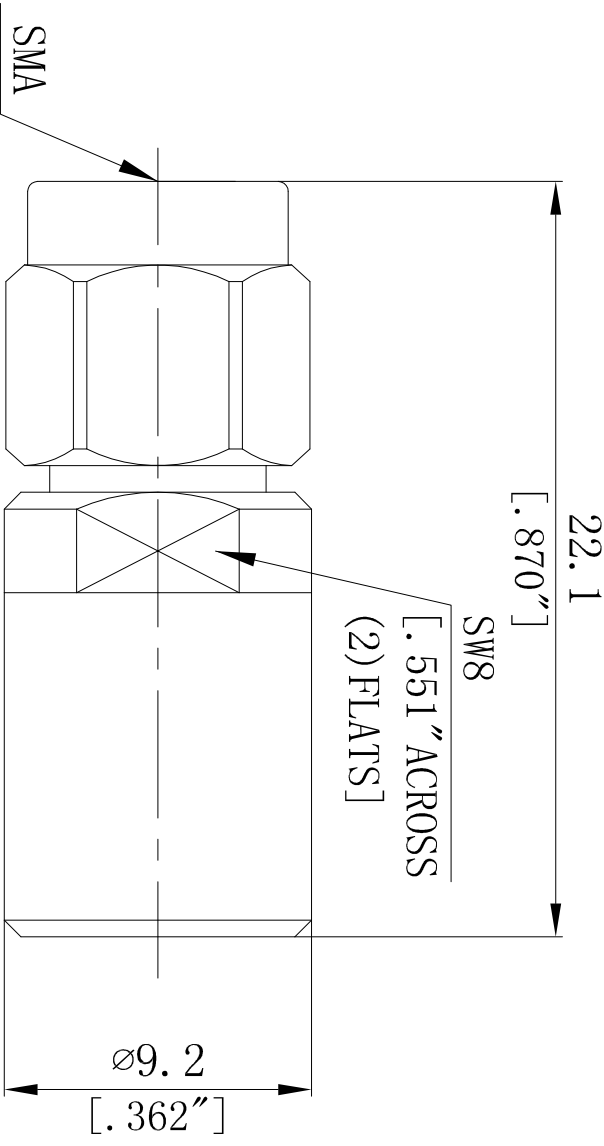

NOTES:

1. ELECTRICAL:
  - 1.1 IMPEDANCE: 50Ω
  - 1.2 INSULATION RESISTANCE: 50000MΩ MIN
  - 1.3 FREQUENCY RANGE: DC~18GHZ
  - 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
  - 1.5 VSWR≤1.25:1@18GHZ
  - 1.6 POWER: 2W

2. ENVIRONMENTAL:

TEMPERATURE RANGE: -55° to +125°

3. MATERIAL AND FINISH:

- 3.1 BODY: STAINLESS STEEL, PASSIVATE
- 3.2 NUT: STAINLESS STEEL, PASSIVATE
- 3.3 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.4 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN	DCJ	25/07/2017	Jiangsu Zdec Microwave Technology Co., Ltd.	
CHK			NAME	
APVD			SMA Male Load	
DIMENSIONS MM			TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 PRC ±0.25			1 PRC ±0.15	
1 PRC ±0.15			2 PRC ±0.12	
2 PRC ±0.12			3 PRC ±0.10	
3 PRC ±0.10			4 PRC ±0.08	
4 PRC ±0.08			FINISH	
FINISH			APPLICAITON SPEC	
SPE TABLE			WEIGHT	
MATERIAL			CUSTOMER DRAWING	

A

B

C

D

A

B

C

D