

4

3

2

1


D

D

21.5
[.870"]

SWS
[.551" ACROSS
(2) FLATS]

ø9.2
[.362"]

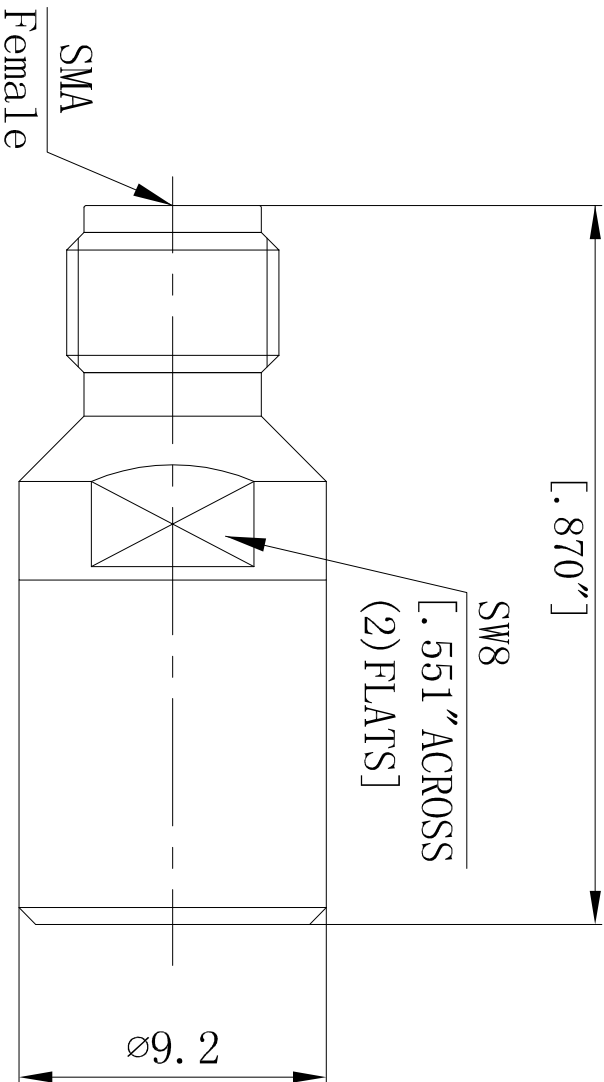

C

C

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~26.5GHZ
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR≤1.30:1@26.5GHZ
- 1.6 POWER:2W

2.ENVIRONMENTAL:

- 2.1 TEMPERATURE RANGE: -55° to +125°

3.MATERIAL AND FINISH:

- 3.1 BODY: STAINLESS STEEL, PASSIVATE
- 3.2 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.3 DIELECTRIC: PTFE, N/A

B

B

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN DCJ 25/07/2017



Jiangsu Zdec Microwave Technology Co., Ltd.

DIMENSIONS

TOLERANCES UNLESS OTHERWISE SPECIFIED:

APPRO

NAME

SMA Female Load



0 P/C ±0.25
1 P/C ±0.15
2 P/C ±0.12
3 P/C ±
4 P/C ±
ANGLES ±1°

PRODUCT SPEC

SIZE

A4

DRAWING NO

SMAKL-27-2W



FINISH

APPLICATION SPEC

WEIGHT

00779

SCALE

2: 1

SPE TABLE

SPE TABLE

CUSTOMER DRAWING

SHEET

1

OF

1

4

3

2

1

A

A