


LOC	DIST	P	LTR	DATE	DMN	APVD
—	—	P	—	—	—	—

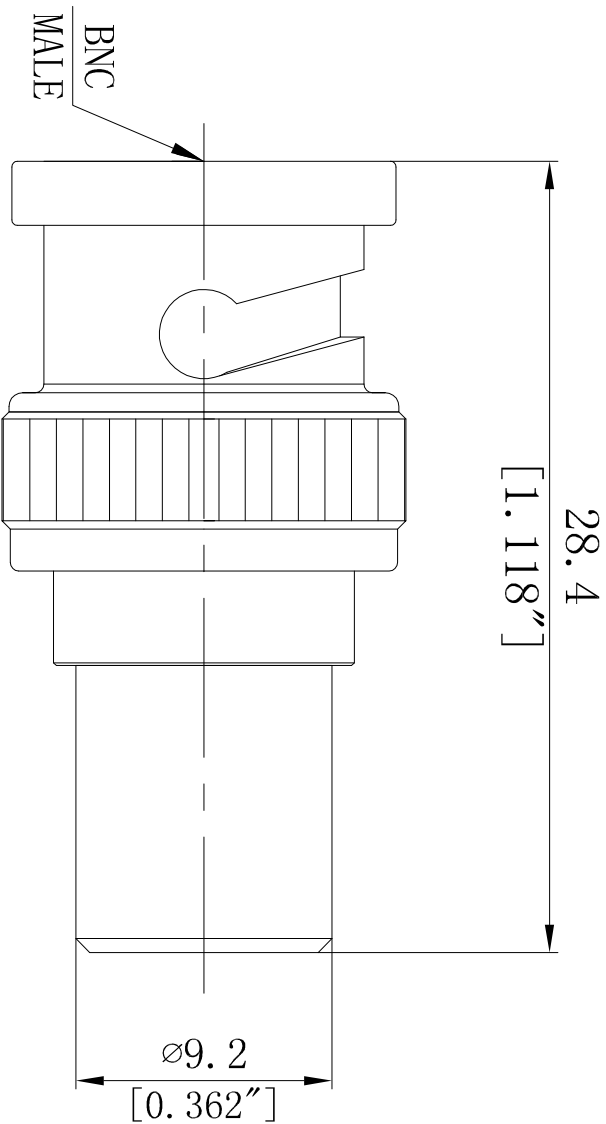

NOTES:

1. ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE: 5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~4GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR ≤ 1.20:1 @ 4GHz
- 1.6 POWER: 2W

2. ENVIRONMENTAL:

- 2.1 TEMPERATURE RANGE: -55° to +165°

3. MATERIAL AND FINISH:

- 3.1 BODY: BRASS, NICKEL PLATING
- 3.2 NUT: BRASS, NICKEL PLATING
- 3.3 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.4 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN	DWP	17/12/2018	<p>Jiangsu ZDeci Microwave Technology Co., Ltd.</p>
CHK			

DIMENSIONS	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	NAME
MM	0 P/C ±0.25 1 P/C ±0.15 2 P/C ±0.12 3 P/C ± ANGLES 1°	PRODUCT SPEC	BNC Male Load

MATERIAL	FINISH	APPLICATION SPEC	SIZE	DRAWING NO
SEE TABLE	SEE TABLE		A4	BNCJL-04-02W

CUSTOMER DRAWING	WEIGHT	SCALE	SHEET	OF	R/E
		2: 1	1	1	1