

4

3

2

1

D

D

C


C

B

B

A

A

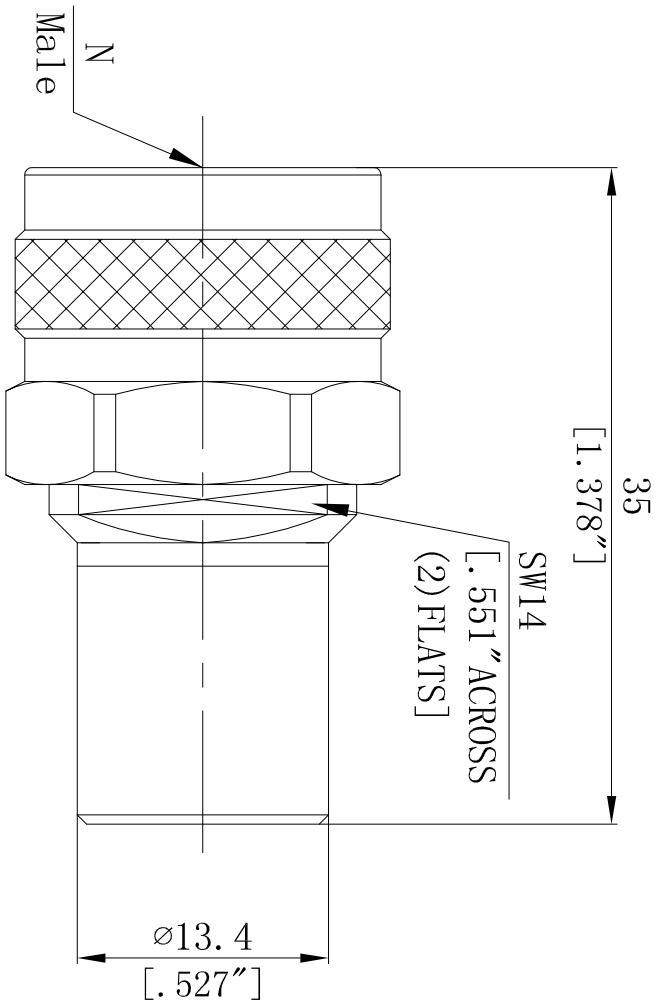

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:50000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~6GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR≤1.15:1@6GHz
- 1.6 POWER:3W

2.ENVIRONMENTAL:

- 2.1 TEMPERATURE RANGE: -55° to +165°

3.MATERIAL AND FINISH:

- 3.1 BODY: BRASS, TERNARY ALLOY PLATING
- 3.2 NUT: BRASS, TERNARY ALLOY PLATING
- 3.3 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.4 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:

- 0 P/C ±0.25
- 1 P/C ±0.15
- 2 P/C ±0.12
- 3 P/C ±
- 4 P/C ±
- ANGLES ±'


APPRO

PRODUCT SPEC

APPLICATION SPEC

NAME

N Male Load



FINISH

WEIGHT

CUSTOMER DRAWING

SIZE

A4

CAGE CODE

00779

DRAWING NO

NJL-06-03W

SCALE

2: 1

SHEET

1 of 1

R/E

1

4

3

2

1

Jiangsu Zdeci Microwave Technology Co., Ltd.