

4

3

2

1

D

D

C

C

B

B

A

A


35

[1.378"]

SW14

[.551" ACROSS
(2) FLATS]

ø13.4
[.527"]

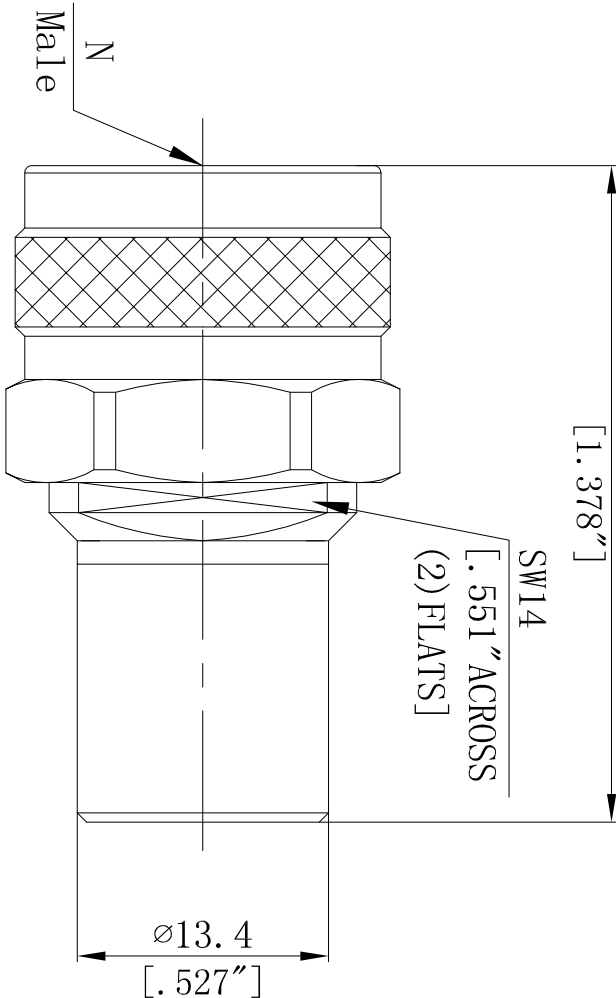

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~18GHZ
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR≤1.25:1@18GHZ
- 1.6 POWER:3W

2.ENVIROMENTAL:

- 2.1 TEMPERATURE RANGE: -55° to +165°


3.MATERIAL AND FINISH:

- 3.1 BODY: STAINLESS STEEL, PASSIVATE
- 3.2 NUT: STAINLESS STEEL, PASSIVATE
- 3.3 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.4 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS
MM

TOLERANCES UNLESS
OTHERWISE SPECIFIED:



MATERIAL

SPE TABLE

DMN DCJ 25/07/2017

APPRD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



Jiangsu Zdieci Microwave Technology Co., Ltd.

NAME

N Male Load

SIZE

A4

CAGE CODE

00779

DRAWING NO

NJL-18-03W

SCALE

2: 1

SHEET

1

OF

1

R/E

1

4

3

2

1