

4

3

2

1

D

D

C


C

B

B

A

A

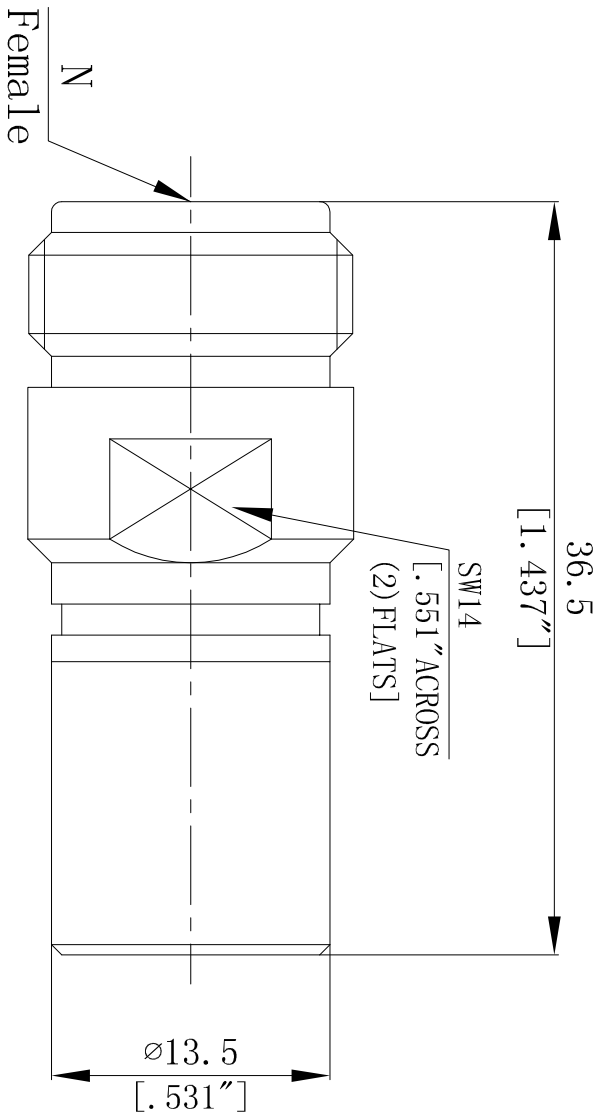

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:50000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~18GHZ
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR≤1.25:1@18GHZ
- 1.6 POWER:3W

2.ENVIROMMENTAL:

- 2.1 TEMPERATURE RANGE: -55° to +165°

3.MATERIAL AND FINISH:

- 3.1 BODY: STAINLESS STEEL, PASSIVATE
- 3.2 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.3 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN DCJ 25/07/2017



Jiangsu Zdeci Microwave Technology Co., Ltd.

DIMENSIONS

TOLERANCES UNLESS OTHERWISE SPECIFIED:

APPRD

NAME

N Female Load



0 P/C ±0.25  
1 P/C ±0.15  
2 P/C ±0.12  
3 P/C ±  
4 P/C ±  
ANGLES ±1°

PRODUCT SPEC

SIZE

A4

CAGE CODE

00779

DRAWING NO

NKL-18-03W

SPE TABLE

FINISH

APPLICAITON SPEC

WEIGHT

SCALE

2: 1

SHEET

1 OF 1

SPE TABLE

SPE TABLE

CUSTOMER DRAWING

R/E

1

1

1

1

4

3

2

1