THIS DRAWING UNPUBLISHED.	RELEASED FOR PUBUCATION

LOC	DIST
—	—

REVISIONS

P	LTR		DATE	DWN	APVD
	—	—	—	—	—

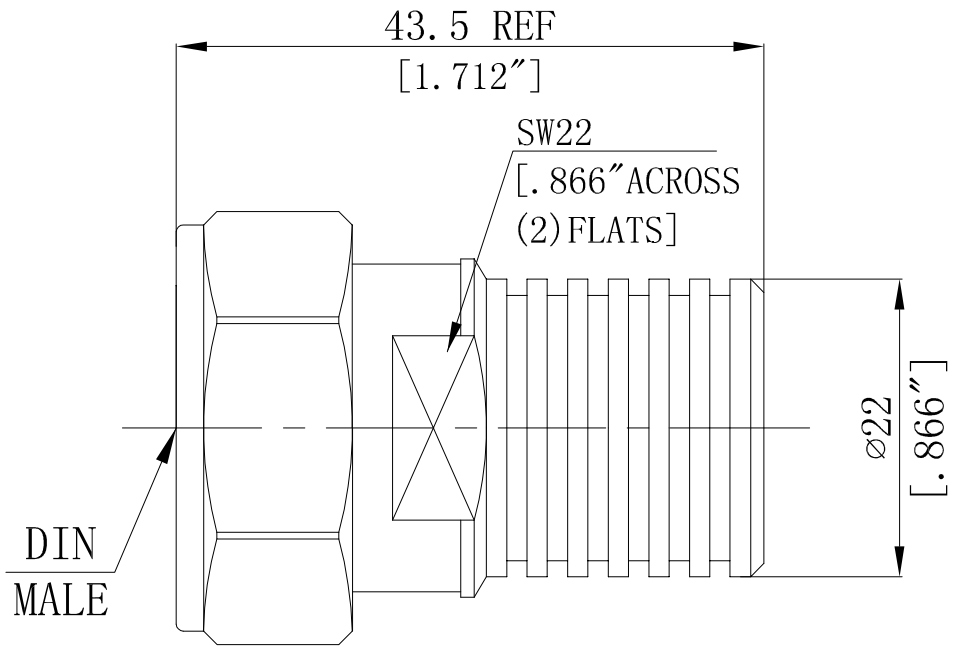

NOTES:

1.ELECTRICAL:

- 1.1 IMPEDANCE: 50Ω
- 1.2 INSULATION RESISTANCE:5000MΩ MIN
- 1.3 FREQUENCY RANGE: DC~7GHz
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V MAX AT SEA LEVEL
- 1.5 VSWR≤1.25:1@7GHz
- 1.6 POWER:5W

2.ENVIRONMENTAL:

- 2.1 TEMPERATURE RANGE: −55° to +165°

3.MATERIAL AND FINISH:

- 3.1 BODY: BRASS, TERNARY ALLOY PLATING
- 3.2 NUT: BRASS, TERNARY ALLOY PLATING
- 3.3 CENTER CONTACT: BERYLLIUM COPPER, GOLD PLATING
- 3.4 DIELECTRIC: PTFE, N/A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±0.25
1 PLC	±0.15
2 PLC	±0.12
3 PLC	±-
4 PLC	±-
ANGLES	±1°

MATERIAL: SEE TABLE

FINISH: SEE TABLE

DWN	DGJ 25/07/2017
CHK	
APVD	
PRODUCT SPEC	—
APPLICATION SPEC	—
WEIGHT	—

CUSTOMER DRAWING

Jiangsu ZDecl Microwave Technology Co., Ltd.

NAME: DIN Male Load

SIZE	CAGE CODE	DRAWING NO
A4	00779	DINJL-07-05W

SCALE	SHEET	OF	RVE
2: 1	1	1	1